



## Woofer ARN-226-05/8

Woofer for HiFi loudspeaker systems. It differs from type ARN-226-03 in coating of cone.

### ACOUSTICAL DATA

Rated noise power <sup>1)</sup>	70	W
Short term maximum power <sup>2)</sup>	140	W
Rated impedance	8	Ohm
Resonance frequency $F_s$ <sup>4)</sup>	30.000	Hz
Rated frequency range	30 - 3000	Hz
Sensitivity <sup>3)</sup>	86	dB

### TS PARAMETERS

Acquired by MLSSA	D-0-10	
Effective piston area $S_d$	216.420	cm <sup>2</sup>
DC resistance of voice coil $R_e$	7.354	Ohm
Mechanical Q factor $Q_{ms}$	5.225	
Electrical Q factor $Q_{es}$	0.878	
Total Q factor $Q_{ts}$	0.752	
Voice coil inductance $L_e$	0.974	
Equivalent volume $V_{as}$	71.535	l
Moving mass (including air load) $M_{ms}$	19.914	g
Suspension compliance $C_{ms}$	1087.393	uM/Newton
Force factor $Bl$	5.985	Tm
Maximum linear displacement $X_{max}$ <sup>5)</sup>	6.4	mm

### MECHANICAL DATA

Voice coil carrier material	aluminium	
Voice coil diameter	25.4	mm
Winding height of voice coil	13	mm
Yoke diameter	25	mm
Air gap height	5	mm
Magnet external diameter	82	mm
Magnet internal diameter	32	mm
Magnet height	15	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	1.1	kg

1) DIN CSN 268-5, closed box 20 dm<sup>3</sup>


2) CSN IEC 268-5, closed box 20 dm<sup>3</sup>

3) CSN IEC 268-5, standard baffle, 1W, 1 m, 200 - 3000 Hz


4) ±10%

5) Peak - peak

Frequency response

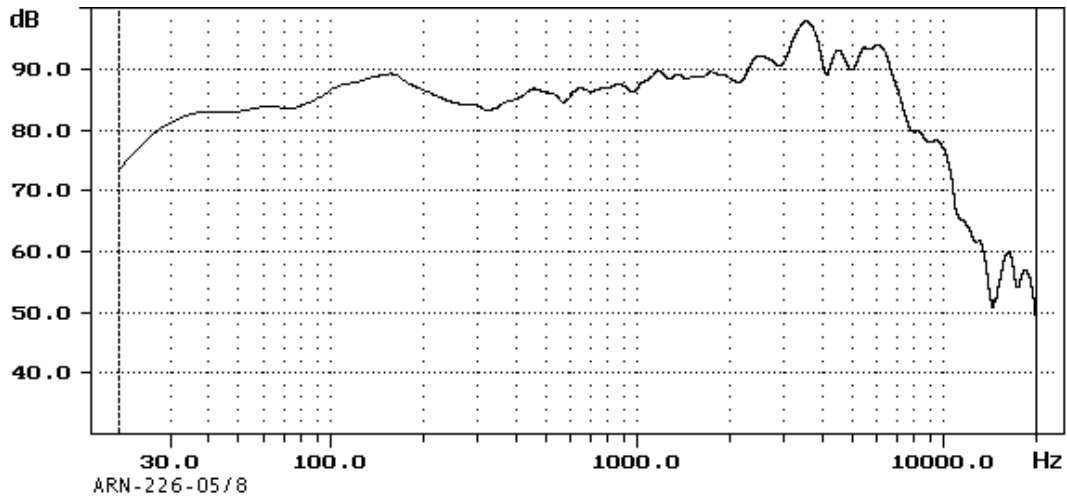

Impedance Magnitude

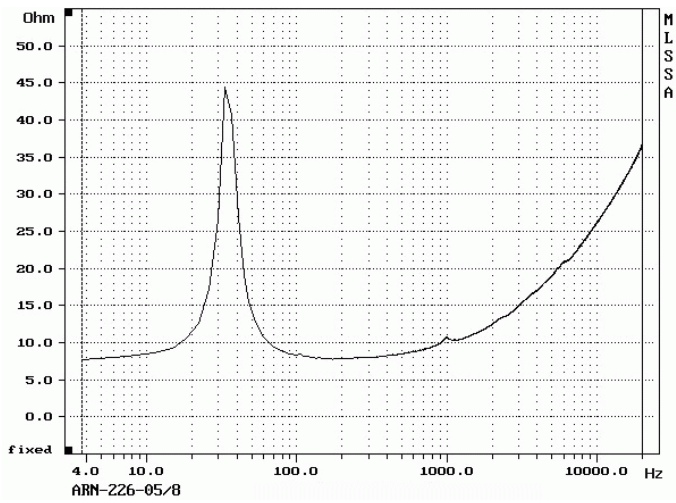

Drawing

