



Professional speaker ARO 7908

Wide range loudspeaker with high power is designed for loudspeaker systems for signal transmission eg. solo guitars, synthesizers, organs, singing, etc.

ACOUSTICAL DATA

Rated noise power ¹⁾	50	W
Short term maximum power ²⁾	100	W
Rated impedance	8	Ohm
Resonance frequency Fs	-	Hz
Rated frequency range	60 - 8000	Hz
Sensitivity ³⁾	95	dB

MECHANICAL DATA


Voice coil carrier material	paper	
Voice coil diameter	34.1	mm
Winding height of voice coil	13	mm
Yoke diameter	33.2	mm
Air gap height	8	mm
Magnet external diameter	140	mm
Magnet internal diameter	63	mm
Magnet height	17	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	3.2	kg

1) DIN IEC 268-5, closed box 50 dm³

2) DIN IEC 268-5, closed box 50 dm³

3) DIN IEC 268-5, standard baffle, 1 W, 1 m, 100 - 5000 Hz

Frequency response

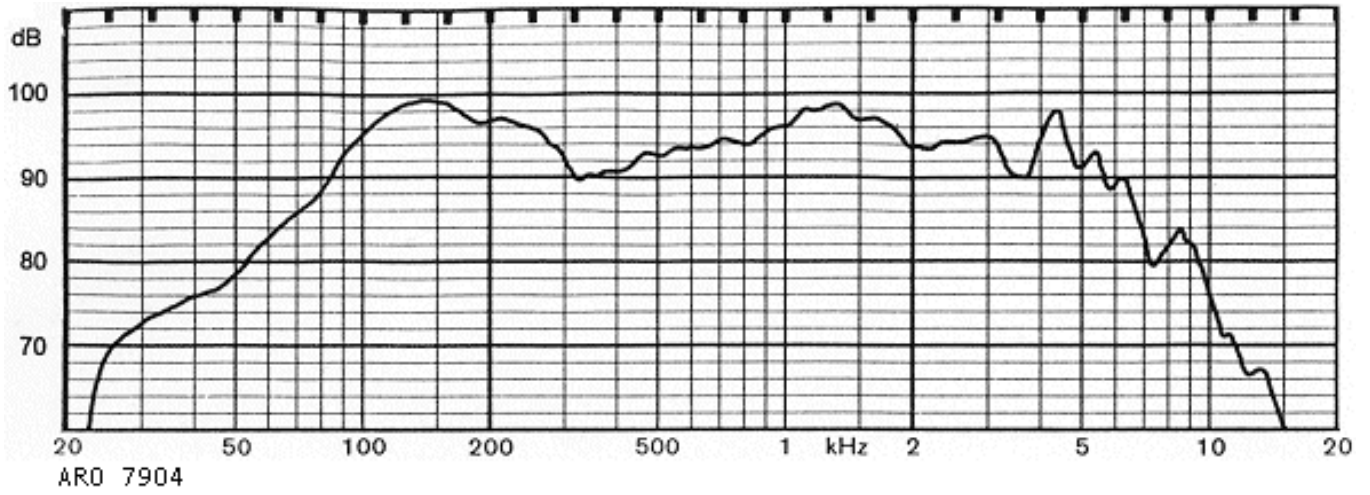

Drawing

