

FM FRONT END (FOR DIGITAL TUNING SYSTEM)


The TA8176SN, TA8176F are FM FRONT END ICs which are designed for radio cassette players and music centers. They are suitable for Digital Tuning System Applications.

FEATURES

- Improved Inter-Modulation Characteristics by Double Balanced Type Mixer Circuit.
- Built-in Current Share Type AGC Circuit for the RF Amp.
- Applicable to double-tuning in radio frequency stage.
- Built-in Local Oscillator Buffer Output Circuit for Digital Tuning System Applications.
- Excellent overload characteristics for change oscillation frequency.
- It is available to TV band. (up to 220MHz)
- Built-in IF Amp.
: $R_O = 330\Omega$ (Typ.), $V_{out} = 80mV_{rms}$ (Typ.)
- Operating Supply Voltage Range


TA8176SN : $V_{CC(opr)} = 4\sim 14V$ ($T_a = 25^\circ C$)

TA8176F : $V_{CC(opr)} = 4\sim 8V$ ($T_a = 25^\circ C$)

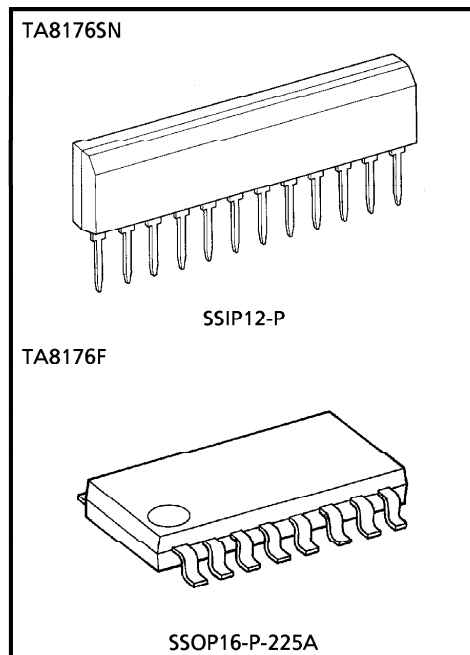

Weight SSIP12-P : 0.65g (Typ.)
SSOP16-P-225A : 0.14g (Typ.)

BLOCK DIAGRAM

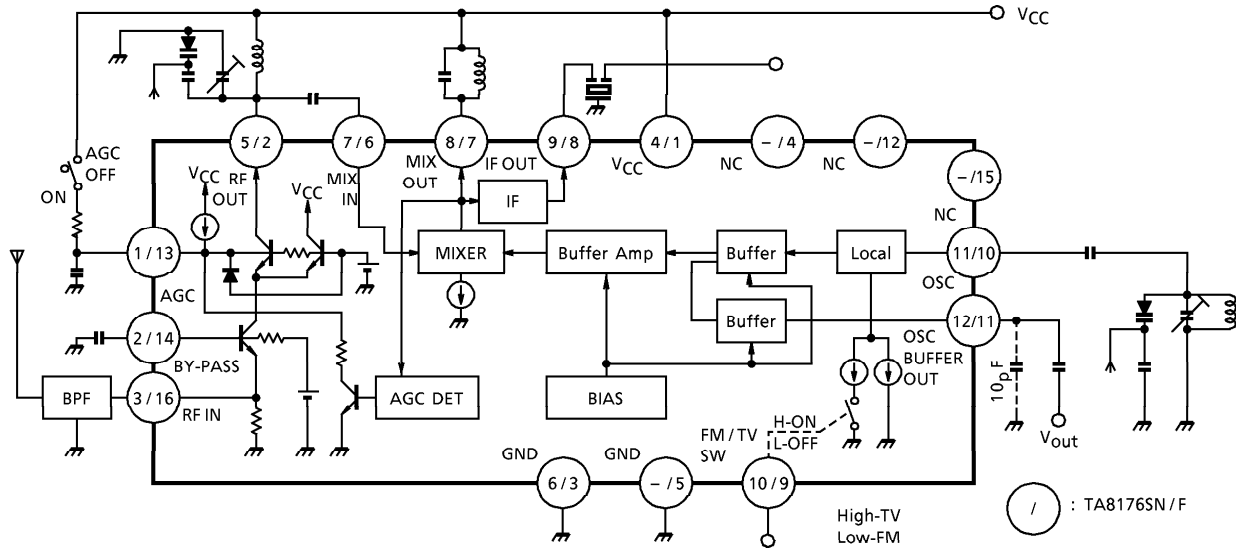

EXPLANATION OF TERMINALS (Terminal voltage shows the Typ. value at $T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$, AGC off, FM mode, and non-signal test circuit)

PIN No. (SN / F)	SYMBOL	CONTENTS	INTERNAL CIRCUIT	DC VOLTAGE (V)
1 / 13	AGC	AGC ON/OFF Switch $V_{1/13} = V_{CC} \rightarrow \text{AGC OFF}$ $V_{1/13} = \text{Open} \rightarrow \text{AGC ON}$		4.7
2 / 14	BY-PASS (RF IN)	By-pass Terminal for RF Amp Circuit. It is necessary to connect External Capacitance. (RF Amp Input Terminal. Antenna Tuning Circuit is connected)		1.46
3 / 16	RF IN (BY-PASS)	RF Amp Input Terminal. (By-pass Terminal for RF Amp Circuit. It is necessary to connect External Capacitance)		0.76
4 / 1	V_{CC}	Power Supply	—	5.0
5 / 2	RF OUT	RF Amp Output Terminal. RF Tuning Circuit is connected	Compare with Pin ① / ⑬, ② / ⑭, ③ / ⑯	5.0

PIN No. (SN / F)	SYMBOL	CONTENTS	INTERNAL CIRCUIT	DC VOLTAGE (V)
6 / 3, 5	GND	GND Terminal (Pin③ : GND Terminal of RF and MIX Circuit. Pin⑤ : GND Terminal of OSC Circuit. at Flat Package)	—	0
7 / 6	MIX IN	Mixer Input Terminal		1.86
8 / 7	MIX OUT	Mixer Output Terminal Mixer Coil is Connected.		5.0
9 / 8	IF OUT	IF Amp Output Terminal.		4.7
10 / 9	FM / TV SW	FM / TV Switch. At this Terminal Voltage is "H" : High OSC Voltage →TV Mode "L" : Low OSC Voltage →FM Mode		0
11 / 10	OSC	Local Terminal. OSC Tank Circuit is connected.		4.9
12 / 11	OSC BUFFER OUT	OSC BUFFER Output Terminal		4.8
- / 4	NC	—	—	—
- / 12				
- / 15				

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage	TA8176SN	V _{CC}	15	V
	TA8176F		9	
Power Dissipation	TA8176SN	P _D (Note)	750	mW
	TA8176F		350	
Operating Temperature		T _{opr}	-25~75	°C
Storage Temperature		T _{stg}	-55~150	°C


(Note) Derated above Ta = 25°C in the proportion of 6mW/°C for TA8176SN and of 2.8mW/°C for TA8176F.

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, V_{CC} = 5V, Ta = 25°C, f = 98MHz, fm = 1kHz, Δf = ±22.5kHz, SW1 = ON, SW2 = OFF)


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{CC1}	1	V _{in} = 0	—	16.5	22	mA
	I _{CC2}	2	V _{in} = 0	—	17.0	22.5	
Conversion Gain	G _{C1}	1	f _{in} = 98MHz V _{in} = 50dB _μ V EMF G _{C1} = 20log ₁₀ $\frac{V_{out}}{V_{in}}$	37	41	—	dB
			f _{in} = 180MHz V _{in} = 55dB _μ V EMF G _{C2} = 20log ₁₀ $\frac{V_{out}}{V_{in}}$	36	40	—	
Local OSC Voltage	V _{osc1}	3	f _{OSC} = 108.7MHz	—	275	—	mV _{rms}
	V _{osc2}	3	f _{OSC} = 190.7MHz SW2 = ON	—	150	—	
Local OSC Buffer output Voltage	V _{O(osc1)}	3	f _{OSC} = 108.7MHz	45	80	—	mV _{rms}
	V _{O(osc2)}	3	f _{OSC} = 190.7MHz SW2 = ON	—	80	—	
IF Amp. Output Voltage	V _{out1}	1	f _{in} = 98MHz V _{in} = 80dB _μ V EMF	—	130	—	mV _{rms}
	V _{out2}	2	f _{in} = 98MHz V _{in} = 80dB _μ V EMF	—	130	—	
Local OSC Stop Voltage	V _{stop1}	3	f _{OSC} = 108.7MHz	—	2.5	2.8	V
	V _{stop2}	3	f _{OSC} = 190.7MHz SW2 = ON	—	2.7	3.0	

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Pin③ / ⑩ Impedance	Parallel Input Resistance	$r_{ip3/16}$	4	f = 98MHz	—	42	—	Ω
	Parallel Input Capacitance	$c_{ip3/16}$	4		—	-12	—	pF
Pin⑤ / ② Impedance	Parallel Output Resistance	$r_{op5/2}$	4		—	10	—	k Ω
	Parallel Output Capacitance	$c_{op5/2}$	4		—	7.3	—	pF
Pin⑦ / ⑥ Impedance	Parallel Input Resistance	$r_{ip7/6}$	4		—	2.7	—	k Ω
	Parallel Input Capacitance	$c_{ip7/6}$	4		—	6.7	—	pF
Pin⑧ / ⑦ Impedance	Parallel Output Resistance	$r_{op8/7}$	4	f = 10.7MHz	—	39	—	k Ω
	Parallel Output Capacitance	$c_{op8/7}$	4		—	6.7	—	pF
Pin⑫ / ⑪ Impedance	Parallel Output Resistance	$r_{op12/11}$	4	f = 108MHz	—	95	—	Ω
	Parallel Output Capacitance	$c_{op12/11}$	4		—	1.4	—	pF


TEST CIRCUIT 1

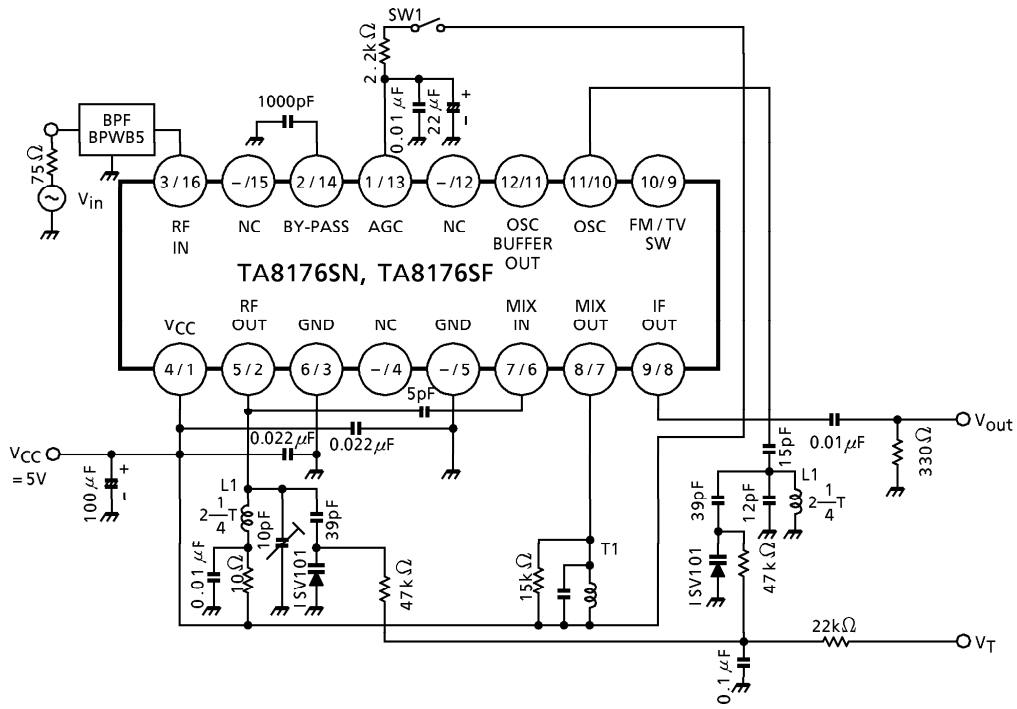

TEST CIRCUIT 2

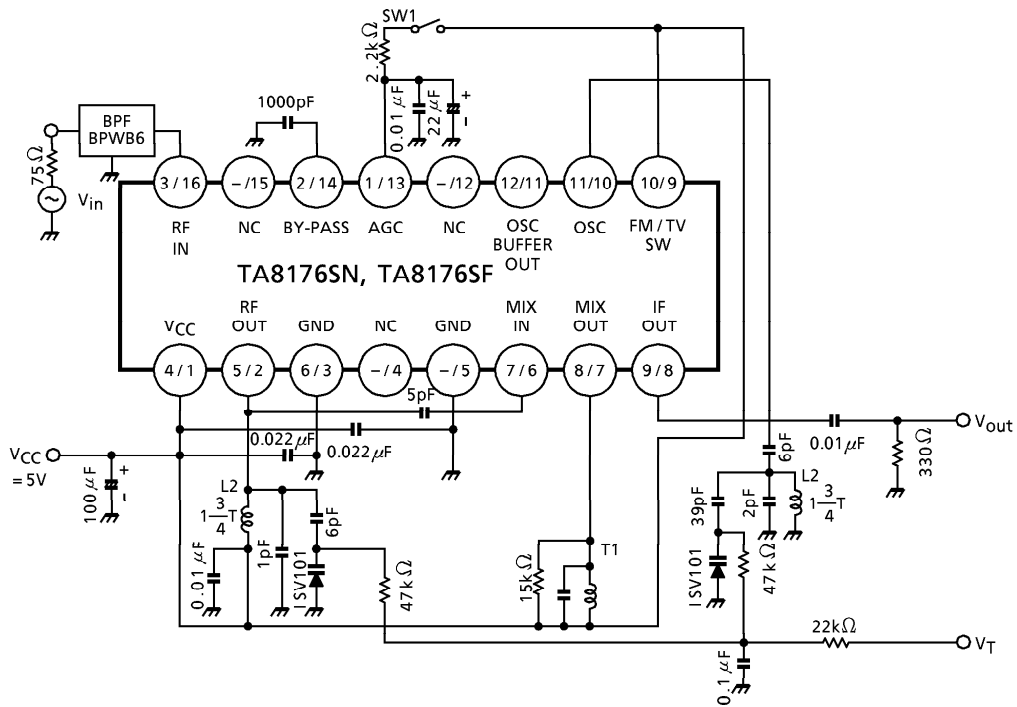



TEST CIRCUIT 3

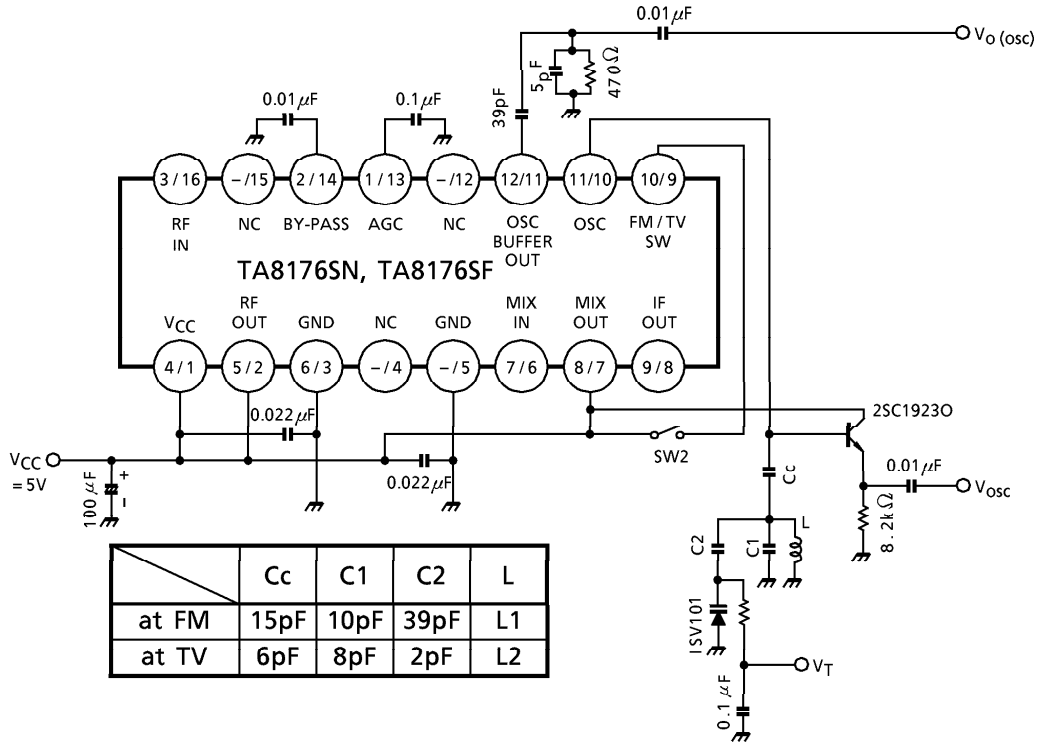

	Cc	C1	C2	L
at FM	15pF	10pF	39pF	L1
at TV	6pF	8pF	2pF	L2


COIL DATA

COIL No.	STAGE	TEST FREQ	L (μ H)	C ₀ (pF)	Q ₀	TURNS				WIRE (mm)	REMARKS
						①-②	②-③	①-③	④-⑥		
L1	FM RF / OSC	100MHz	0.06		100		$2 \frac{1}{4}$			ϕ 0.5 UEW	Within Core
L2	TV RF / OSC	100MHz	0.045		100		$1 \frac{3}{4}$			ϕ 0.5 UEW	Within Core
T1	FM IFT	10.7MHz		75	100			13	2	ϕ 0.16 UEW	SUMIDA 2153-414-041A




TEST CIRCUIT 4


Pin③ / ⑩ input impedance

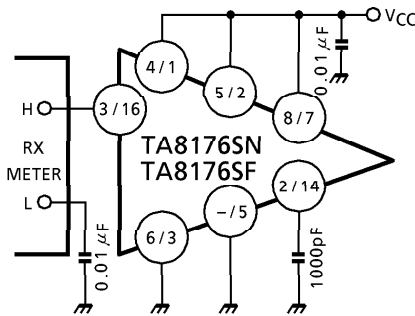


Pin⑤ / ② output impedance

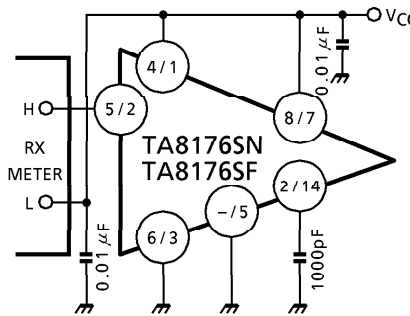


Pin⑦ / ⑥ input impedance






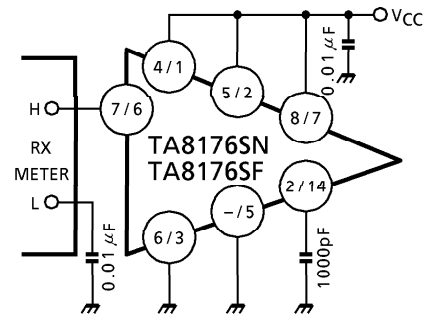






Pin⑧ / ⑦ output impedance

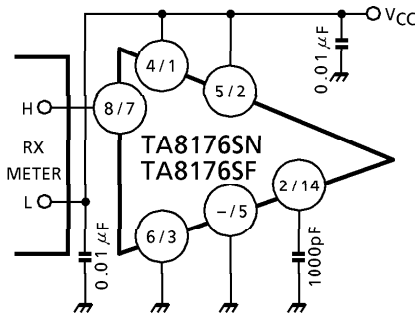

Pin⑫ / ⑪ output impedance

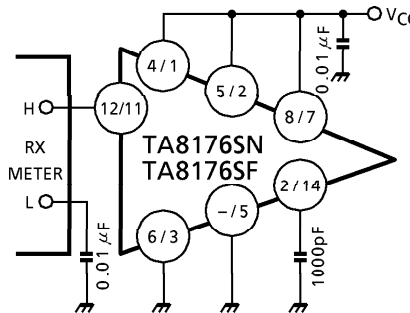


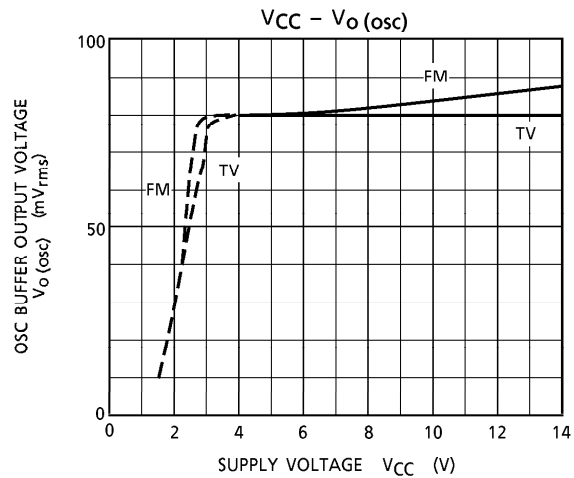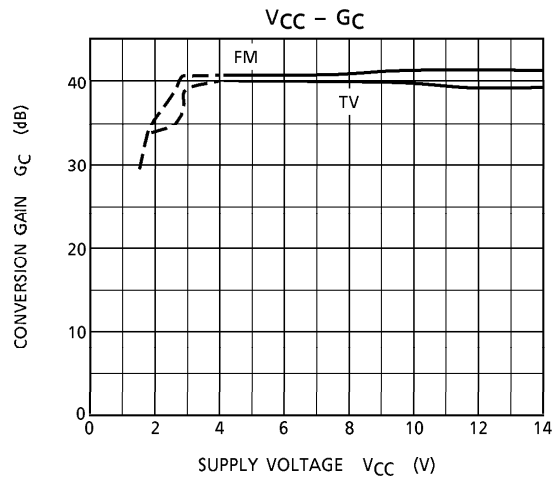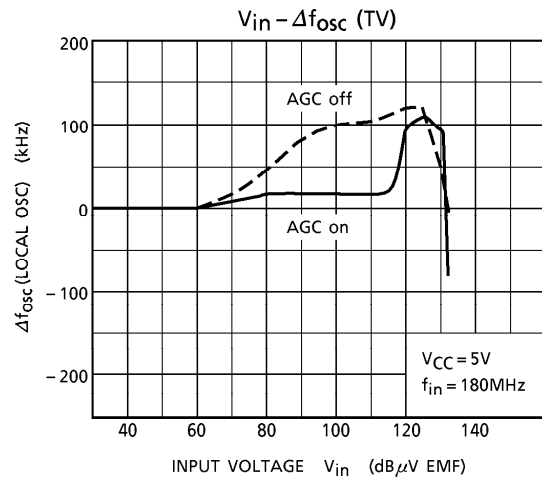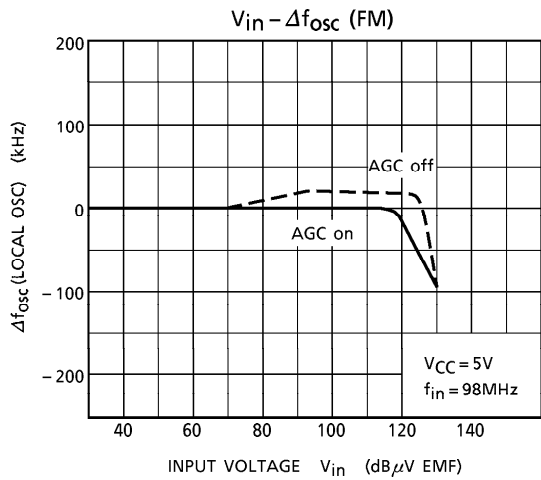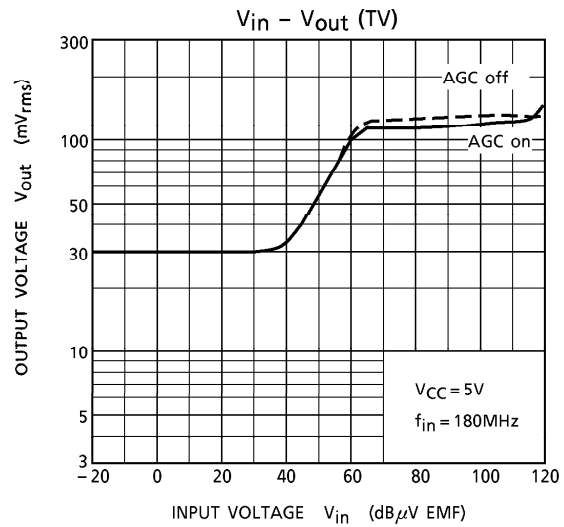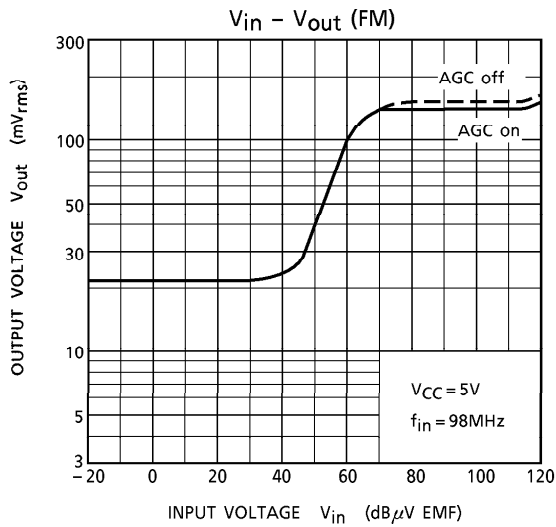

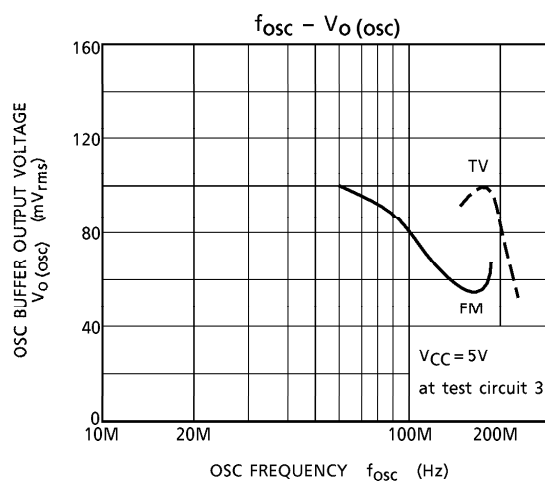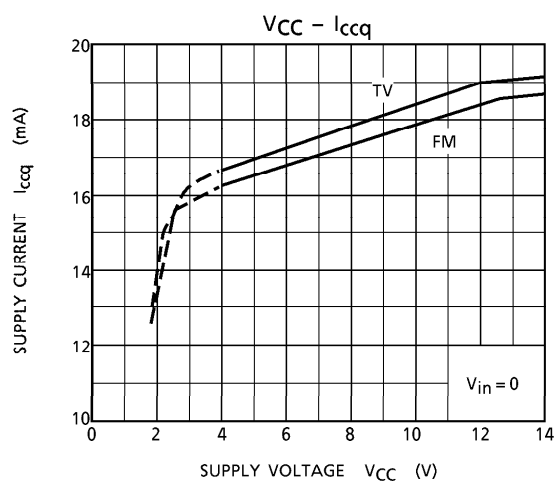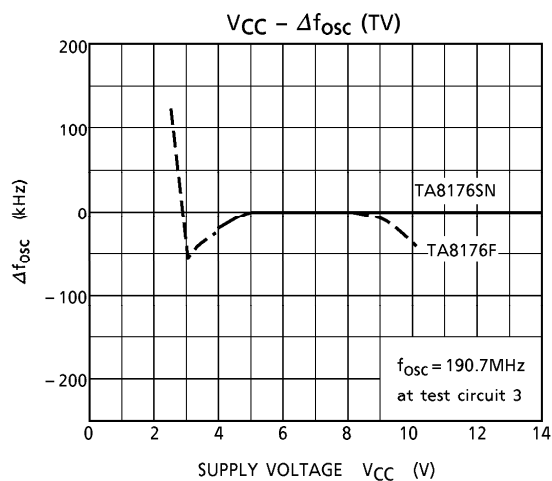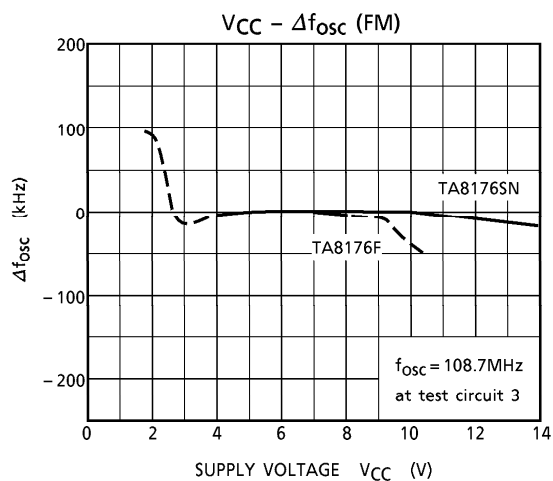

OUTLINE DRAWING
SSIP12-P





Unit : mm

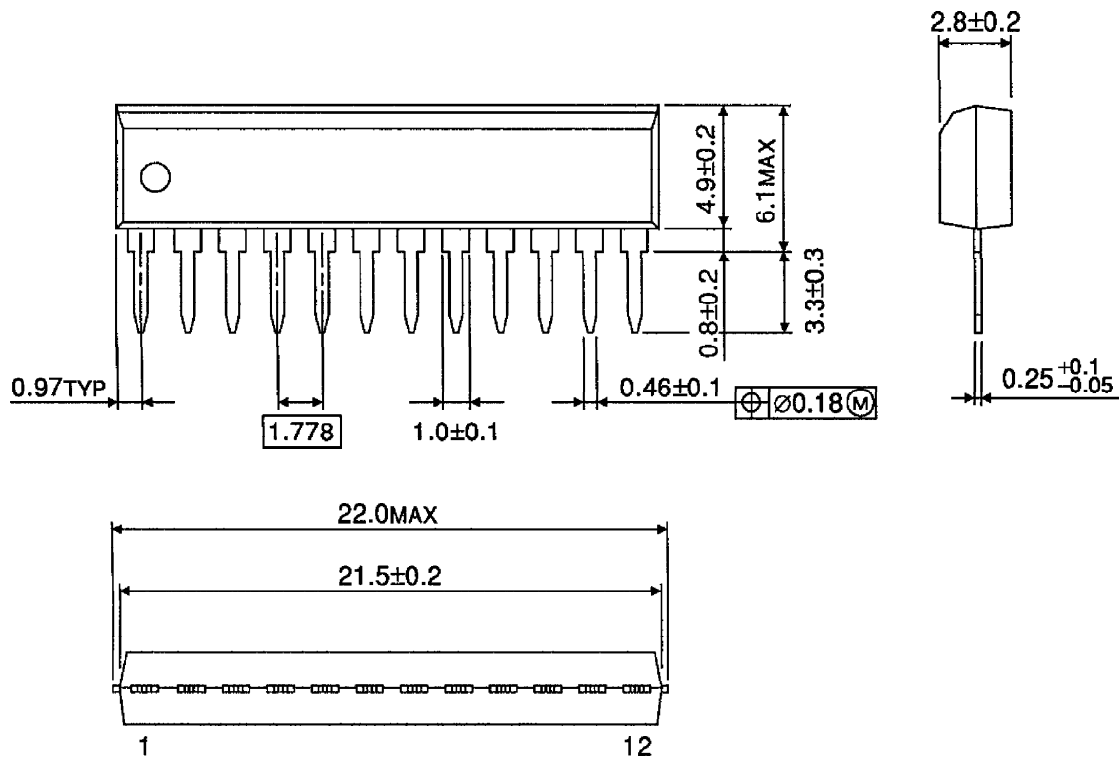

Weight : 0.65g (Typ.)

OUTLINE DRAWING
SSOP16-P-225A

Unit : mm

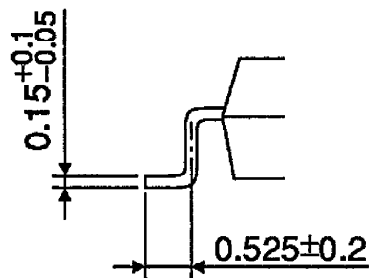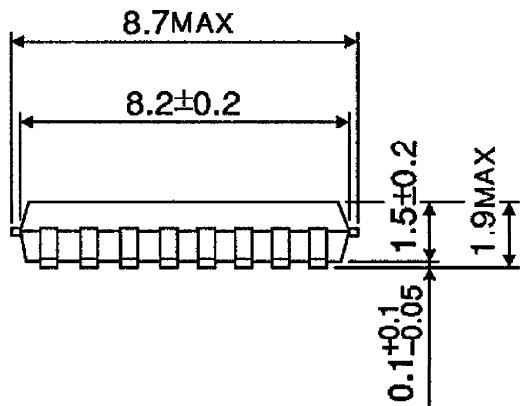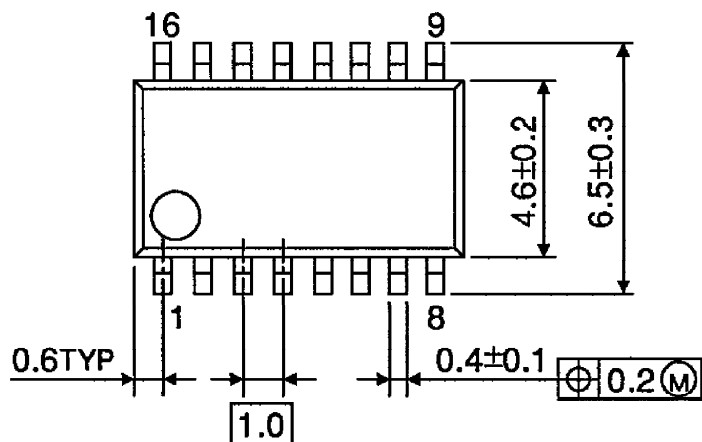

Weight : 0.14g (Typ.)