



Widerange ARX-130-20/8

A direct-radiator electrodynamic loudspeaker with a covering dome to radiate the lower and medium, possibly also the whole band of audible frequencies for use in products of consumer electronics, in cars and in loudspeaker systems for decentralized sound-tracking.

ACOUSTICAL DATA

Rated noise power ¹⁾	25	W
Short term maximum power ²⁾	75	W
Rated impedance	8	Ohm
Resonance frequency F_s	-	Hz
Rated frequency range	75 - 15000	Hz
Sensitivity ³⁾	89	dB

MECHANICAL DATA


Voice coil carrier material	aluminium	
Voice coil diameter	18.4	mm
Winding height of voice coil	4.3	mm
Yoke diameter	18	mm
Air gap height	4	mm
Magnet external diameter	82	mm
Magnet internal diameter	33	mm
Magnet height	17	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	0.85	kg

1) DIN IEC 268-5, closed box 5 dm³

2) CSN IEC 268-5, closed box 5 dm³

3) CSN IEC 268-5, standard baffle. 1W, 1 m, 200 - 10000 Hz

Frequency response

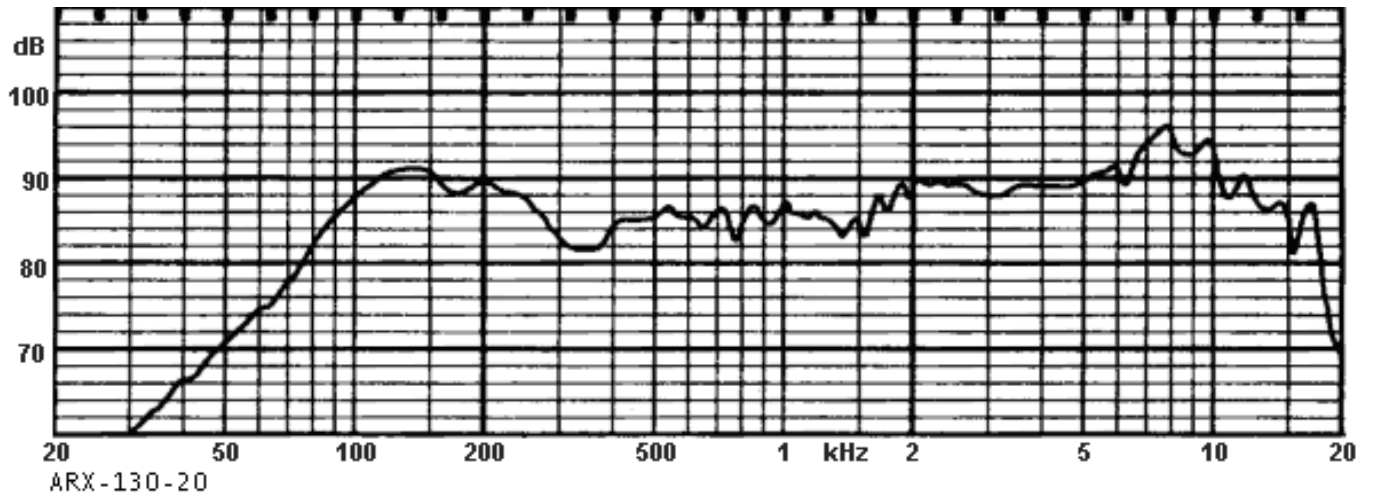

Drawing

