

REDCOAT GUITAR SERIES

CV-65

Tapping in to another flavor of classic British tone, the 12" CV-65 features warm, throaty mids, sweet, articulate highs, and nice, detailed harmonic complexity. As compared to the 75 watt model, the 65 watt CV-65 is more round and full in the lows, less aggressive in the mids, and is more focused and articulate on the highs.

12" | **65 WATTS**
8 Ω



SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	65 W
Resonance (Fs)	76 Hz
Usable Frequency Range	80 Hz – 5 kHz
Sensitivity*	100.6 dB
DC Resistance (Re)	6.9 Ω
Qts	0.59
Magnet Weight	34 oz.
Gap Height	0.31", 8 mm
Voice Coil Diameter	1.75", 44 mm


MOUNTING INFORMATION

Enclosure Type	Closed Back
Open Back	Acceptable
Driver Volume Displaced	0.069 cu.ft., 1.96 liters
Overall Diameter	12.17", 309.1 mm
Baffle Hole Diameter	11.13", 282.7 mm
Depth	5.13", 130.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.24", 6.1 mm
Mounting Holes B.C.D.	11.75", 298.5 mm
Net Weight	7.3 lbs , 3.31 kg
Shipping Weight	9.4 lbs , 4.26 kg

MATERIALS OF CONSTRUCTION

Copper voice coil
Nomex former
Ferrite magnet
Non-vented core
Pressed steel basket
Full molded paper cone
Paper cone edge
Zurette dust cap

FREQUENCY RESPONSE & IMPEDANCE CURVE*

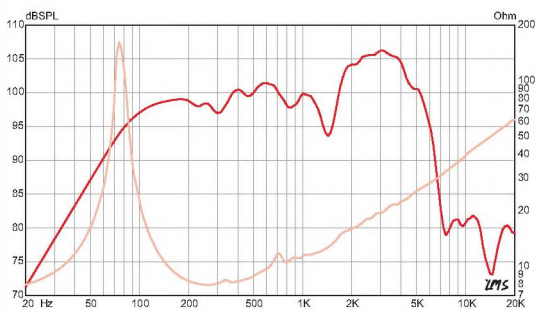

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.