PROFESSIONAL SERIES

DELTA PRO 12-450A

The Delta Pro 12-450 is a lighter weight version of the Delta Pro 12. Recommended as a woofer or midbass in vented enclosures. Also makes a perfect replacement in many portable PA cabinets.

- 750 W Program Power
- 12" Nominal Diameter
- 8 O

APPLICATION		ENCLOSURE	
Midrange		Sealed Box	
Midbass	V	Vented Box	V
Woofer	V	Scoop Loading	
Subwoofer		Horn Loading	V
Bass Guitar			

SPECIFICATION

Nominal Basket Diameter	12", 305 mm		
Nominal Impedance*	8 Ω		
Power Rating*			
Program Power	750 W		
Nominal Power	375 W		
Resonance	44 Hz		
Usable Frequency Range	44 Hz – 4 kHz		
Sensitivity*	99.8 dB		
Magnet Weight	56 oz.		
Gap Height	0.313″ <u>,</u> 7.9 mm		
Voice Coil Diameter	2.5", 64 mm		



THIELE & SMALL PARAMETERS

MOUNTING INFORMATION


44 Hz	Recommended Enclosure Volume	
5.04 Ω	Sealed	N/A
0.54 mH		
7.59	Vented	36.81-93.45 liters,
0.39		1.3-3.5 cu.ft.
0.37	Driver Volume Displaced	0.079 cu.ft., 2.25 liters
5 cu.ft., 141.66 liters	Overall Diameter	12.38", 314.5 mm
271.5 cc	Baffle Hole Diameter	11.07", 281.2 mm
0.36 mm/N	Front Sealing Gasket	Yes
11.47 T-M	Rear Sealing Gasket	Yes
36 grams	Mounting Holes Diameter	0.27", 6.9 mm
115	Mounting Holes B.C.D.	11.57", 293.9 mm
5.1 mm	Depth	5.5", 139.7 mm
532.4 cm2	Net Weight	11.7 lbs , 5.31 kg
13.7 mm	Shipping Weight	14 lbs , 6.35 kg
_	5.04 Ω 0.54 mH 7.59 0.39 0.37 5 cu.ft., 141.66 liters 271.5 cc 0.36 mm/N 11.47 T-M 36 grams 115 5.1 mm 532.4 cm2	Sealed Sealed

MATERIALS OF CONSTRUCTION

Aluminum voice coil
Polyimide former
Ferrite magnet
Vented and extended core
Die-cast aluminum basket
Paper cone
Cloth cone edge
Paper dust cap



FREQUENCY RESPONSE & IMPEDANCE CURVE*

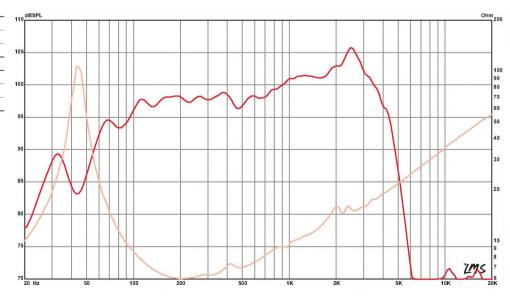

^{*} See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.