

Type Number: R2604/832000

Features:

Key Features:

- Dual Ring Radiator diaphragm (Patent)
- Wave-guide center plug (Patent)
- Extended Frequency To Above 40KHz
- Very Low Resonance Frequency - 550Hz
- Low Distortion
- Silk Fabric Diaphragm
- Rear Chamber
- copper-clad aluwire



Specs:

Electrical Data

Nominal impedance	Zn	4	ohm
Minimum impedance	Zmin	-	ohm
Maximum impedance	Zo	13	ohm
DC resistance	Re	2,9	ohm
Voice coil inductance	Le	-	mH

T-S Parameters

Resonance Frequency	fs	550	Hz
Mechanical Q factor	Qms	-	
Electrical Q factor	Qes	-	
Total Q factor	Qts	-	
Force factor	Bl	-	Tm
Mechanical resistance	Rms	-	Kg/s
Moving mass	Mms	0,30	g
Suspension compliance	Cms	-	mm/N
Effective cone diameter	D	-	cm
Effective piston area	Sd	5,40	cm ²
Equivalent volume	Vas	-	ltrs
Sensitivity (2.83V/1m)		90,84	dB

Power Handling

100h RMS noise test (IEC)	-	W
Long-term Max Power (IEC18.3)	-	W
Max linear SPL (rms) @ power		dB/W
Short-term Max Power (IEC18.2)		W


Voice Coil and Magnet Parametres

Voice coil diameter	25,0	mm
Voice coil height	2,2	mm
Voice coil layers	2,0	
Height of gap	2,5	mm
Linear excursion +/-	0,2	mm
Max mech. Excursion +/-	-	mm
Flux density of gap		mWb
Total useful flux		mWb
Diameter of magnet	72,0	mm
Height of magnet	15,0	mm
Weight of magnet	-	Kg
Unit net weight	0,5	Kg

Notes:

IEC Specs refer to IEC 60268,5 third sdition.
 All Scan Speak products are RoHS compliant

Frequency:

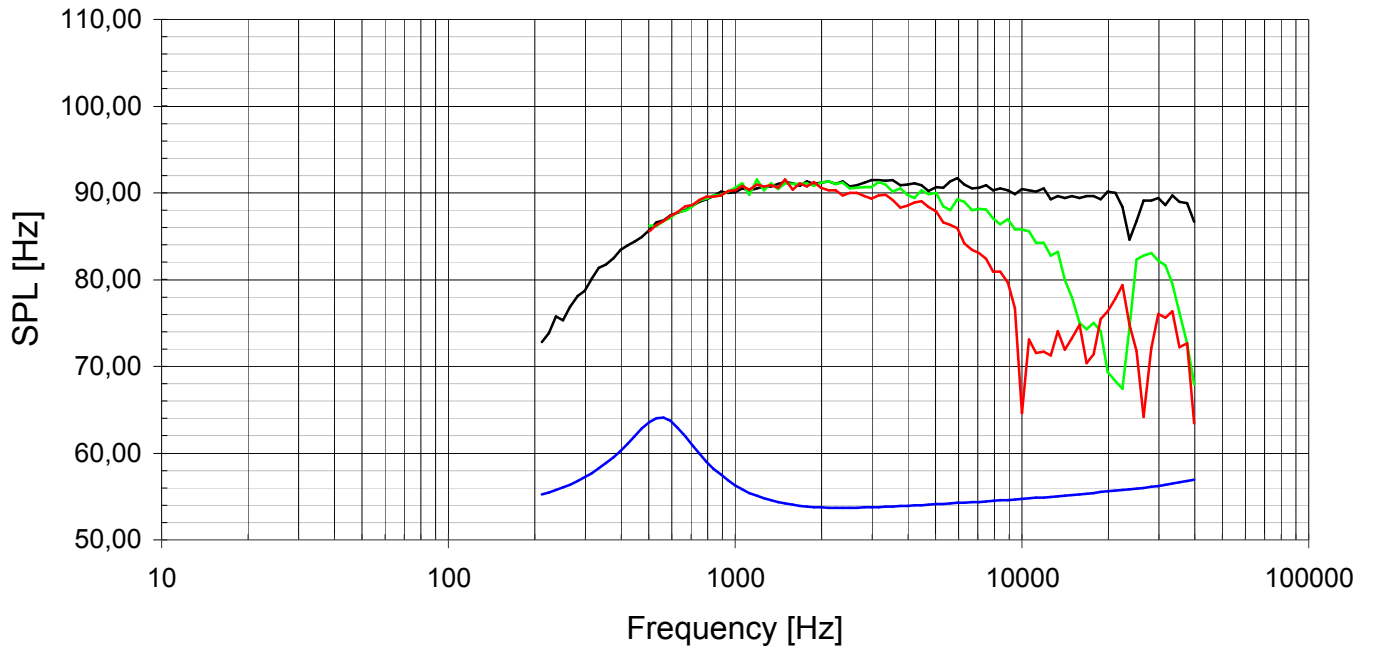

Mechanical Dimensions:

