

## DSV14196 +3.3V Supply EIA/TIA-232 5 Driver x 3 Receiver

Check for Samples: [DSV14196](#)

### FEATURES


- Conforms to EIA/TIA-232-E and ITU-T V.28
- 5 drivers and 3 receivers
- Flow-through pinout
- Failsafe receiver outputs high when inputs open
- 20-pin wide SOIC package
- LapLink® compatible—230.4 kbps data rate
- +3.3V Logic Interface
- Commercial temperature range option DSV14196
  - (0°C to 70°C)
- Industrial temperature range option DSV14196T
  - (–40°C to +85°C)

### DESCRIPTION

The DSV14196/DSV14196T is a five driver, three receiver device which conforms to the EIA/TIA-232-E and the ITU-T V.28 standards.

The flow-through pinout facilitates simple non-crossover board layout. The DSV14196/DSV14196T provides a peripheral side one-chip solution for the common 9-pin serial RS-232 interface between data terminals and data communications equipment.

### Connection Diagram

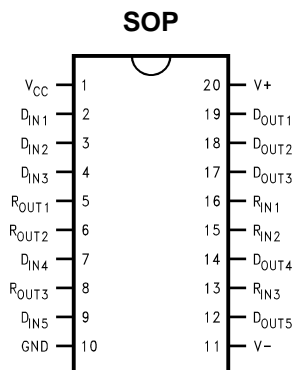

**Figure 1. Order Number DSV14196WM,DSV14196TWM  
See NS Package Number M20B**




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LapLink is a registered trademark of Travelling Software.

All other trademarks are the property of their respective owners.

## Functional Diagram

### Block Diagram

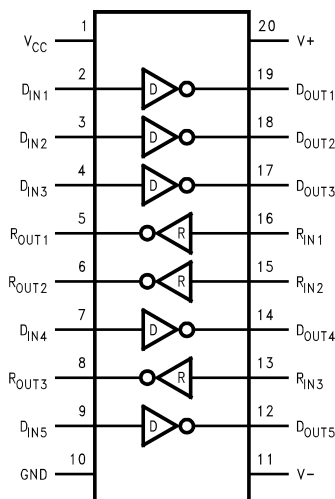

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### Absolute Maximum Ratings <sup>(1)</sup>

Supply Voltage ( $V_{CC}$ )	+7V
Supply Voltage ( $V^+$ )	+15V
Supply Voltage ( $V^-$ )	-15V
Driver Input Voltage	0V to $V_{CC}$
Driver Output Voltage (Power Off)	$\pm 15V$
Receiver Input Voltage	$\pm 25V$
Receiver Output Voltage ( $R_{OUT}$ )	0V to $V_{CC}$
Maximum Power Package Dissipation @ +25°C	
M Package	1524 mW
Derate M Package	12.2 mW/°C above 25°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature Range (Soldering, 4 sec.)	+260°C
ESD Ratings (HBM, 1.5 k $\Omega$ , 100 pF)	$\geq 1.5$ kV

(1) Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The table of Electrical Characteristics specifies conditions of device operation.

### Recommended Operating Conditions

	Min	Nom	Max	Units
Supply Voltage ( $V_{CC}$ )	+3.0	+3.3	+3.6	V
Supply Voltage ( $V^+$ )	+9.0	+12.0	+13.2	V
Supply Voltage ( $V^-$ )	-13.2	-12.0	-9.0	V
Operating Free Air Temperature ( $T_A$ )				
DSV14196	0	+25	+70	°C
DSV14196T	-40	+25	+85	°C

## Electrical Characteristics<sup>(1) (2)</sup> DSV14196

Over recommended operating supply and temperature ranges unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
<b>DEVICE CHARACTERISTICS</b>							
$I_{CC}$	$V_{CC}$ Supply Current	No Load, All Inputs at +3.3V		8	16	mA	
$I^+$	$V^+$ Supply Current	No Load, All Driver Inputs at 0.8V or +2V. All Receiver Inputs at 0.7V or 2.4V.	$V^+ = +9V, V^- = -9V$	16	26	mA	
			$V^+ = +13.2V, V^- = -13.2V$	23	36	mA	
$I^-$	$V^-$ Supply Current		$V^+ = +9V, V^- = -9V$	-18	-26	mA	
			$V^+ = +13.2V, V^- = -13.2V$	-25	-36	mA	
<b>DRIVER CHARACTERISTICS</b>							
$V_{IH}$	High Level Input Voltage		2.0			V	
$V_{IL}$	Low Level Input Voltage				0.8	V	
$I_{IH}$	High Level Input Current	$V_{IN} = 3.3V$			10	$\mu A$	
$I_{IL}$	Low Level Input Current	$V_{IN} = 0V$		-1.1	-1.5	mA	
$V_{OH}$	High Level Output Voltage	$R_L = 3\text{ k}\Omega, V_{IN} = 0.8V, V^+ = +9V, V^- = -9V$	6	7		V	
		$R_L = 3\text{ k}\Omega, V_{IN} = 0.8V, V^+ = +12V, V^- = -12V$	8	9		V	
		$R_L = 7\text{ k}\Omega, V_{IN} = 0.8V, V^+ = +13.2V, V^- = -13.2V$	10	11.5		V	
$V_{OL}$	Low Level Output Voltage	$R_L = 3\text{ k}\Omega, V_{IN} = 2V, V^+ = +9V, V^- = -9V$		-7	-6	V	
		$R_L = 3\text{ k}\Omega, V_{IN} = 2V, V^+ = +12V, V^- = -12V$		-10	-8	V	
		$R_L = 7\text{ k}\Omega, V_{IN} = 2V, V^+ = +13.2V, V^- = -13.2V$		-11.5	-10	V	
$I_{OS^+}$	Output High Short	$V_{OUT} = 0V, V_{IN} = 0.8V$		-6	-12	-18	mA
	Circuit Current <sup>(3)</sup>						
$I_{OS^-}$	Output Low Short	$V_{OUT} = 0V, V_{IN} = 2.0V$		6	12	18	mA
	Circuit Current <sup>(3)</sup>						
$R_O$	Output Resistance	$-2V \leq V_{OUT} \leq +2V, V^+ = V^- = V_{CC} = 0V$	300			$\Omega$	
		$-2V \leq V_{OUT} \leq +2V, V^+ = V^- = V_{CC} = \text{Open Circuit}$	300			$\Omega$	
<b>RECEIVER CHARACTERISTICS</b>							
$V_{TH}$	Input High Threshold	$V_{OUT} \leq 0.4V, I_O = 3.2\text{ mA}$		1.5	1.85	2.4	V
	(Recognized as a High Signal)						
$V_{TL}$	Input Low Threshold (Recognized as a Low Signal)	$V_{OUT} \geq 1.7V, I_O = -0.5\text{ mA}$		0.7	0.9	1.3	V
$R_{IN}$	Input Resistance	$V_{IN} = \pm 3V \text{ to } \pm 15V$	3.0	3.8	7.0	k $\Omega$	
$I_{IN}$	Input Current	$V_{IN} = +15V$	2.1	4.0	5.0	mA	
		$V_{IN} = +3V$	0.43	0.7	1.0	mA	
		$V_{IN} = -15V$	-2.1	-4.0	-5.0	mA	
		$V_{IN} = -3V$	-0.43	-0.7	-1.0	mA	
$V_{OH}$	High Level Output Voltage <sup>(4)</sup>	$I_{OH} = -0.5\text{ mA}, V_{IN} = -3V$	1.7	2.4		V	
		$I_{OH} = -10\text{ }\mu A, V_{IN} = -3V$	2.7	3.2		V	
		$I_{OH} = -0.5\text{ mA}, V_{IN} = \text{Open Circuit}$	1.7	2.4		V	
		$I_{OH} = -10\text{ }\mu A, V_{IN} = \text{Open Circuit}$	2.7	3.2		V	
$V_{OL}$	Low Level Output Voltage	$I_{OL} = 3.2\text{ mA}, V_{IN} = +3V$		0.2	0.4	V	
$I_{OSR}$	Short Circuit Current	$V_{OUT} = 0V, V_{IN} = 0V$ <sup>(3)</sup>	-0.6	-1.8	-3.0	mA	

(1) Current into device pins is defined as positive. Current out of the device pins is defined as negative. All voltages are referenced to ground unless otherwise specified. For current, minimum and maximum values are specified as an absolute value and the sign is used to indicate direction. For voltage logic levels, the more positive value is designated as maximum. For example, if -6V is a maximum, the typical value -6.8V is more negative.

(2) All typicals are given for:  $V_{CC} = +3.3V, V^+ = +12V, V^- = -12V, T_A = +25^\circ C$ .

(3) Only one driver output shorted at a time.

(4) If receiver inputs are unconnected, receiver output is a logic high.

**Electrical Characteristics**<sup>(1) (2)</sup>  
**DSV14196T**

Over recommended operating supply and temperature ranges unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
<b>DEVICE CHARACTERISTICS</b>							
$I_{CC}$	$V_{CC}$ Supply Current	No Load, All Inputs at +3.3V		8	16	mA	
$I^+$	$V^+$ Supply Current	No Load, All Driver Inputs at 0.8V or +2V. All Receiver Inputs at 0.7V or 2.4V.	$V^+ = +9V, V^- = -9V$		16	26	mA
			$V^+ = +13.2V, V^- = -13.2V$		23	36	mA
$I^-$	$V^-$ Supply Current		$V^+ = +9V, V^- = -9V$		-18	-26	mA
			$V^+ = +13.2V, V^- = -13.2V$		-25	-36	mA
<b>DRIVER CHARACTERISTICS</b>							
$V_{IH}$	High Level Input Voltage		2.0			V	
$V_{IL}$	Low Level Input Voltage				0.8	V	
$I_{IH}$	High Level Input Current	$V_{IN} = 3.3V$			10	$\mu A$	
$I_{IL}$	Low Level Input Current	$V_{IN} = 0V$		-1.1	-1.9	mA	
$V_{OH}$	High Level Output Voltage	$R_L = 3\text{ k}\Omega, V_{IN} = 0.8V, V^+ = +9V, V^- = -9V$	5.5	7		V	
		$R_L = 3\text{ k}\Omega, V_{IN} = 0.8V, V^+ = +12V, V^- = -12V$	7.5	9		V	
		$R_L = 7\text{ k}\Omega, V_{IN} = 0.8V, V^+ = +13.2V, V^- = -13.2V$	9	11.5		V	
$V_{OL}$	Low Level Output Voltage	$R_L = 3\text{ k}\Omega, V_{IN} = 2V, V^+ = +9V, V^- = -9V$		-7	-5.5	V	
		$R_L = 3\text{ k}\Omega, V_{IN} = 2V, V^+ = +12V, V^- = -12V$		-10	-7.5	V	
		$R_L = 7\text{ k}\Omega, V_{IN} = 2V, V^+ = +13.2V, V^- = -13.2V$		-11.5	-9	V	
$I_{OS^+}$	Output High Short	$V_{OUT} = 0V, V_{IN} = 0.8V$	-4	-12	-22	mA	
	Circuit Current <sup>(3)</sup>						
$I_{OS^-}$	Output Low Short	$V_{OUT} = 0V, V_{IN} = 2.0V$	4	12	22	mA	
	Circuit Current <sup>(3)</sup>						
$R_O$	Output Resistance	$-2V \leq V_{OUT} \leq +2V, V^+ = V^- = V_{CC} = 0V$	300			$\Omega$	
		$-2V \leq V_{OUT} \leq +2V, V^+ = V^- = V_{CC} = \text{Open Circuit}$	300			$\Omega$	
<b>RECEIVER CHARACTERISTICS</b>							
$V_{TH}$	Input High Threshold	$V_{OUT} \leq 0.5V, I_O = 3.2\text{ mA}$	1.4	1.85	2.8	V	
	(Recognized as a High Signal)						
$V_{TL}$	Input Low Threshold (Recognized as a Low Signal)	$V_{OUT} \geq 1.7V, I_O = -0.5\text{ mA}$	0.5	0.9	1.4	V	
$R_{IN}$	Input Resistance	$V_{IN} = \pm 3V \text{ to } \pm 15V, T_A = 0^\circ C \text{ to } 70^\circ C$	3.0	3.8	7.0	k $\Omega$	
$I_{IN}$	Input Current	$V_{IN} = +15V, T_A = 0^\circ C \text{ to } +70^\circ C$	2.1	4.0	5.0	mA	
		$V_{IN} = +3V, T_A = 0^\circ C \text{ to } +70^\circ C$	0.43	0.7	1.0	mA	
		$V_{IN} = -15V, T_A = 0^\circ C \text{ to } +70^\circ C$	-2.1	-4.0	-5.0	mA	
		$V_{IN} = -3V, T_A = 0^\circ C \text{ to } +70^\circ C$	-0.4 3	-0.7	-1.0	mA	
$V_{OH}$	High Level Output Voltage <sup>(4)</sup>	$I_{OH} = -0.5\text{ mA}, V_{IN} = -3V, V_{CC} = 3.3V$	1.8	2.4		V	
		$I_{OH} = -10\text{ }\mu A, V_{IN} = -3V, V_{CC} = 3.3V$	3.0	3.2		V	
		$I_{OH} = -0.5\text{ mA}, V_{IN} = \text{Open Circuit}, V_{CC} = 3.3V$	1.8	2.4		V	
		$I_{OH} = -10\text{ }\mu A, V_{IN} = \text{Open Circuit}, V_{CC} = 3.3V$	3.0	3.2		V	
$V_{OL}$	Low Level Output Voltage	$I_{OL} = 3.2\text{ mA}, V_{IN} = +3V$		0.2	0.5	V	
$I_{OSR}$	Short Circuit Current	$V_{OUT} = 0V, V_{IN} = 0V$ <sup>(3)</sup>	-0.4	-1.8	-3.2	mA	

(1) Current into device pins is defined as positive. Current out of the device pins is defined as negative. All voltages are referenced to ground unless otherwise specified. For current, minimum and maximum values are specified as an absolute value and the sign is used to indicate direction. For voltage logic levels, the more positive value is designated as maximum. For example, if -6V is a maximum, the typical value -6.8V is more negative.

(2) All typicals are given for:  $V_{CC} = +3.3V, V^+ = +12V, V^- = -12V, T_A = +25^\circ C$ .

(3) Only one driver output shorted at a time.

(4) If receiver inputs are unconnected, receiver output is a logic high.

**Switching Characteristics** <sup>(1) (2) (3)</sup>  
**DSV14196 & DSV14196T**
 $T_A = +25^\circ\text{C}$ 

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>DRIVER CHARACTERISTICS</b>						
$t_{PHL}$	Propagation Delay High to Low	$R_L = 3\text{ k}\Omega$ , $C_L = 50\text{ pF}$ (Figure 2 Figure 3)		60	350	ns
$t_{PLH}$	Propagation Delay Low to High			240	350	ns
$t_r$ , $t_f$	Rise/Fall Time <sup>(4)</sup>			40		ns
<b>RECEIVER CHARACTERISTICS</b>						
$t_{PHL}$	Propagation Delay High to Low	$R_L = 1.5\text{ k}\Omega$ , $C_L = 15\text{ pF}$ (includes fixture plus probe), (Figure 4 Figure 5)		150	350	ns
$t_{PLH}$	Propagation Delay Low to High			240	350	ns
$t_r$	Rise Time			40	175	ns
$t_f$	Fall Time			40	100	ns


(1) All typicals are given for:  $V_{CC} = +3.3\text{V}$ ,  $V^+ = +12\text{V}$ ,  $V^- = -12\text{V}$ ,  $T_A = +25^\circ\text{C}$ .

(2) Generator characteristics for driver input:  $f = 64\text{ kHz}$  (128 kbps),  $t_r = t_f < 10\text{ ns}$ ,  $V_{IH} = 3\text{V}$ ,  $V_{IL} = 0\text{V}$ , duty cycle = 50%.

(3) Generator characteristics for receiver input:  $f = 64\text{ kHz}$  (128 kbps),  $t_r = t_f = 200\text{ ns}$ ,  $V_{IH} = 3\text{V}$ ,  $V_{IL} = -3\text{V}$ , duty cycle = 50%.


(4) Refer to typical curves. Driver output slew rate is measured from the +3V to the -3V level on the output waveform. Inputs not under test are connected to  $V_{CC}$  or GND. Slew rate is determined by load capacitance. To comply with a  $30\text{ V}/\mu\text{s}$  maximum slew rate, a minimum load capacitance of 390 pF for DSV14196 or 620 pF for DSV14196T is recommended.

## Parameter Measurement Information

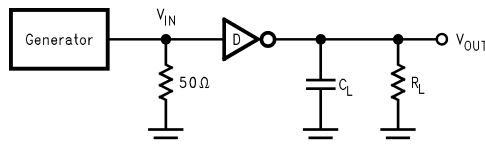


**Figure 2. Driver Propagation Delay and Transition Time Test Circuit <sup>(1)</sup>**

(1) Generator characteristics for driver input:  $f = 64$  kHz (128 kbps),  $t_r = t_f < 10$  ns,  $V_{IH} = 3V$ ,  $V_{IL} = 0V$ , duty cycle = 50%.

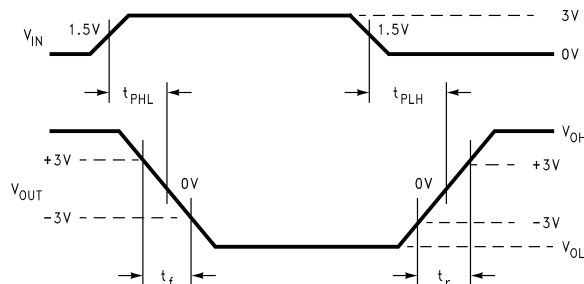


**Figure 3. Driver Propagation Delay and Transition Time Waveforms Slew Rate (SR) =  $6V/(t_r \text{ or } t_f)$**

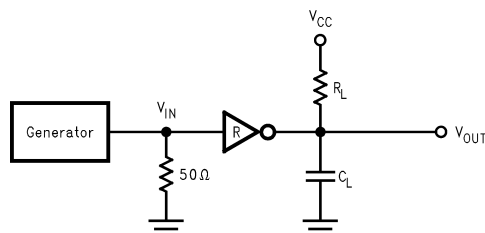

**Figure 4. Receiver Propagation Delay and Transition Time Test Circuit <sup>(1)</sup>**

(1) Generator characteristics for receiver input:  $f = 64$  kHz (128 kbps),  $t_r = t_f = 200$  ns,  $V_{IH} = 3V$ ,  $V_{IL} = -3V$ , duty cycle = 50%.

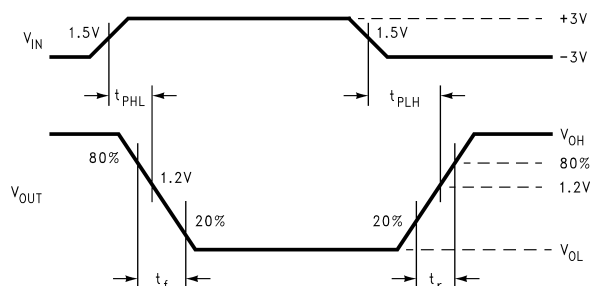

**Figure 5. Receiver Propagation Delay and Transition Time Waveform**

## Pin Functions

### Pin Descriptions

Pin #	Pin Name	Description
2, 3, 4, 7, 9	D <sub>IN</sub>	Driver Input Pins
12, 14, 17, 18, 19	D <sub>OUT</sub>	Driver Output Pins, RS-232 Levels
13, 15, 16	R <sub>IN</sub>	Receiver Input Pins, RS-232 Levels

**Pin Descriptions (continued)**

Pin #	Pin Name	Description
5, 6, 8	R <sub>OUT</sub>	Receiver Output Pins
10	GND	Ground
20	V <sup>+</sup>	Positive Power Supply Pin (+9.0 ≤ V <sup>+</sup> ≤ +13.2)
11	V <sup>-</sup>	Negative Power Supply Pin (-9.0 ≤ V <sup>-</sup> ≤ -13.2)
1	V <sub>CC</sub>	Positive Power Supply Pin (+3.3V ±10%)

**Applications Information**

In a typical Data Terminal Equipment (DTE) to Data Circuit-Terminating Equipment (DCE) 9-pin de-facto interface implementation, 2 data lines and 6 control lines are required. The data lines are TXD and RXD. The control lines are RTS, DTR, DSR, DCD, CTS and RI.

The DSV14196/DSV14196T is a 5 x 3 Driver/Receiver and offers a single chip solution for this DTE interface. As shown in [Figure 6](#), this interface allows for direct flow-thru interconnect. For a more conservative design, the user may wish to insert ground traces between the signal lines to minimize cross talk.

**FAILSAFE RECEIVER OUTPUTS**

The DSV14196/DSV14196T features failsafe receiver outputs. In failsafe mode, if the receiver input becomes zero or an open-circuit, the receiver output is pulled to a high level.

**LapLink<sup>®</sup> COMPATIBILITY**

The DSV14196/DSV14196T can easily provide 128 kbps data rate under maximum driver load conditions of C<sub>L</sub> = 2500 pF and R<sub>L</sub> = 3 kΩ, while power supplies are:

$$V_{CC} = +3.0V, V^+ = 10.8V, V^- = -10.8V \quad (1)$$

**MOUSE DRIVING**

A typical mouse can be powered from the drivers. Two driver outputs connected in parallel and set to V<sub>OH</sub> can be used to supply power to the V<sup>+</sup> pin of the mouse. The third driver output is set to V<sub>OL</sub> to sink the current from the V<sup>-</sup> terminal. Refer to typical curves of V<sub>OUT</sub>/I<sub>OUT</sub>. Typical mouse specifications are:

$$10 \text{ mA at } +6V \quad 5 \text{ mA at } -6V \quad (2)$$

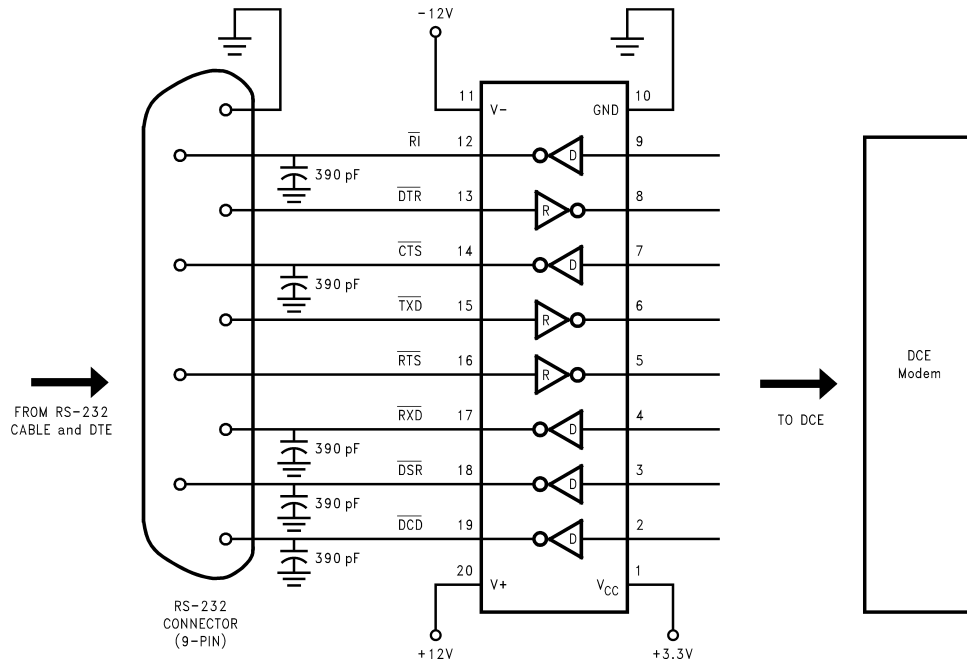



Figure 6. Typical DCE Application



### Typical Performance Characteristics


Driver Output Slew Rate between +3V and -3V  
vs  
Load Capacitance

Conditions:  $V_{CC} = 3.3V$ ,  $R_L = 5\ k\Omega$ ,  $T_A = 25^\circ C$ ,  $f_{IN} = 64\ kHz$   
Square Wave

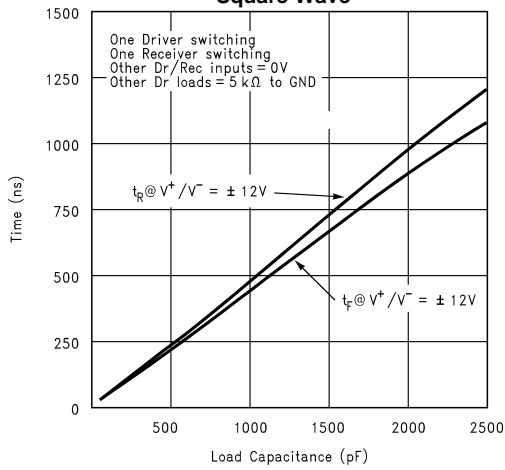


Driver Output Voltage  
vs  
Frequency and  $C_L$

Conditions:  $V_{CC} = 3.3V$ ,  $R_L = 5\ k\Omega$ ,  $T_A = 25^\circ C$

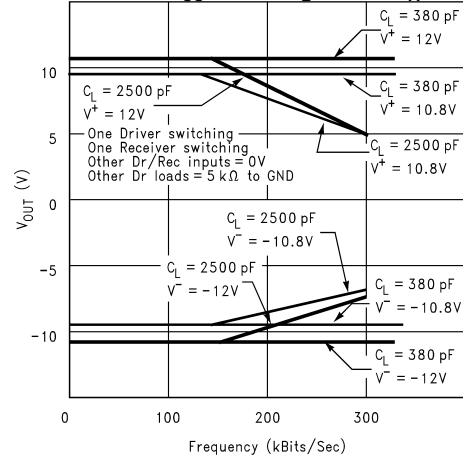

Driver Output Current  
vs  
Output Voltage

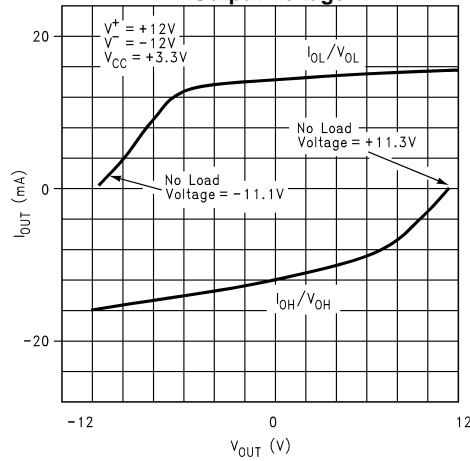

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)