


The RF Line 550 MHz CATV Amplifier

. . . designed specifically for 550 MHz CATV applications. Features ion-implanted arsenic emitter transistors with 7.0 GHz f_T and an all gold metallization system.

- Specified for 77-Channel Performance
- Broadband Power Gain — @ $f = 40\text{--}550$ MHz
 $G_p = 22$ dB (Typ) @ 50 MHz
 22 dB (Min) @ 550 MHz
- Broadband Noise Figure @ 550 MHz
 $NF = 6.0$ dB (Max)
- Superior Gain, Return Loss and DC Current Stability with Temperature
- All Gold Metallization
- 7.0 GHz Ion-Implanted Transistors

MHW6222

**22 dB GAIN
550 MHz
77-CHANNEL
CATV INPUT/OUTPUT
TRUNK AMPLIFIER**



CASE 714Y-03, STYLE 1

ABSOLUTE MAXIMUM RATINGS


Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V_{in}	+60	dBmV
DC Supply Voltage	V_{CC}	+28	Vdc
Operating Case Temperature Range	T_C	-20 to +100	°C
Storage Temperature Range	T_{stg}	-40 to +100	°C

ELECTRICAL CHARACTERISTICS ($V_{CC} = 24$ Vdc, $T_C = +30^\circ\text{C}$, 75 Ω system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	40	—	550	MHz
Power Gain — 50 MHz	G_p	21.4	22	22.6	dB
Power Gain — 550 MHz	G_p	22	—	—	dB
Slope	S	0.2	—	1.5	dB
Gain Flatness (Peak To Valley)	—	—	0.2	0.4	dB
Return Loss — Input/Output ($Z_0 = 75$ Ohms) 40–550 MHz	IRL/ORL	18	—	—	dB
Second Order Intermodulation Distortion ($V_{out} = +46$ dBmV per ch., Ch 2, M13, M22) ($V_{out} = +44$ dBmV per ch., Ch 2, M30, M39)	IMD	—	-80 -72	— -66	dB
Cross Modulation Distortion ($V_{out} = +46$ dBmV per ch.) 60-Channel FLAT ($V_{out} = +44$ dBmV per ch.) 77-Channel FLAT	XMD ₆₀ XMD ₇₇	—	-60 -60	— -57	dB
Composite Triple Beat ($V_{out} = +46$ dBmV per ch.) 60-Channel FLAT ($V_{out} = +44$ dBmV per ch.) 77-Channel FLAT	CTB ₆₀ CTB ₇₇	—	-61 -59	— -57	dB
Noise Figure ($f = 550$ MHz)	NF	—	5.0	6.0	dB
DC Current	I_{DC}	—	210	240	mA



PACKAGE DIMENSIONS

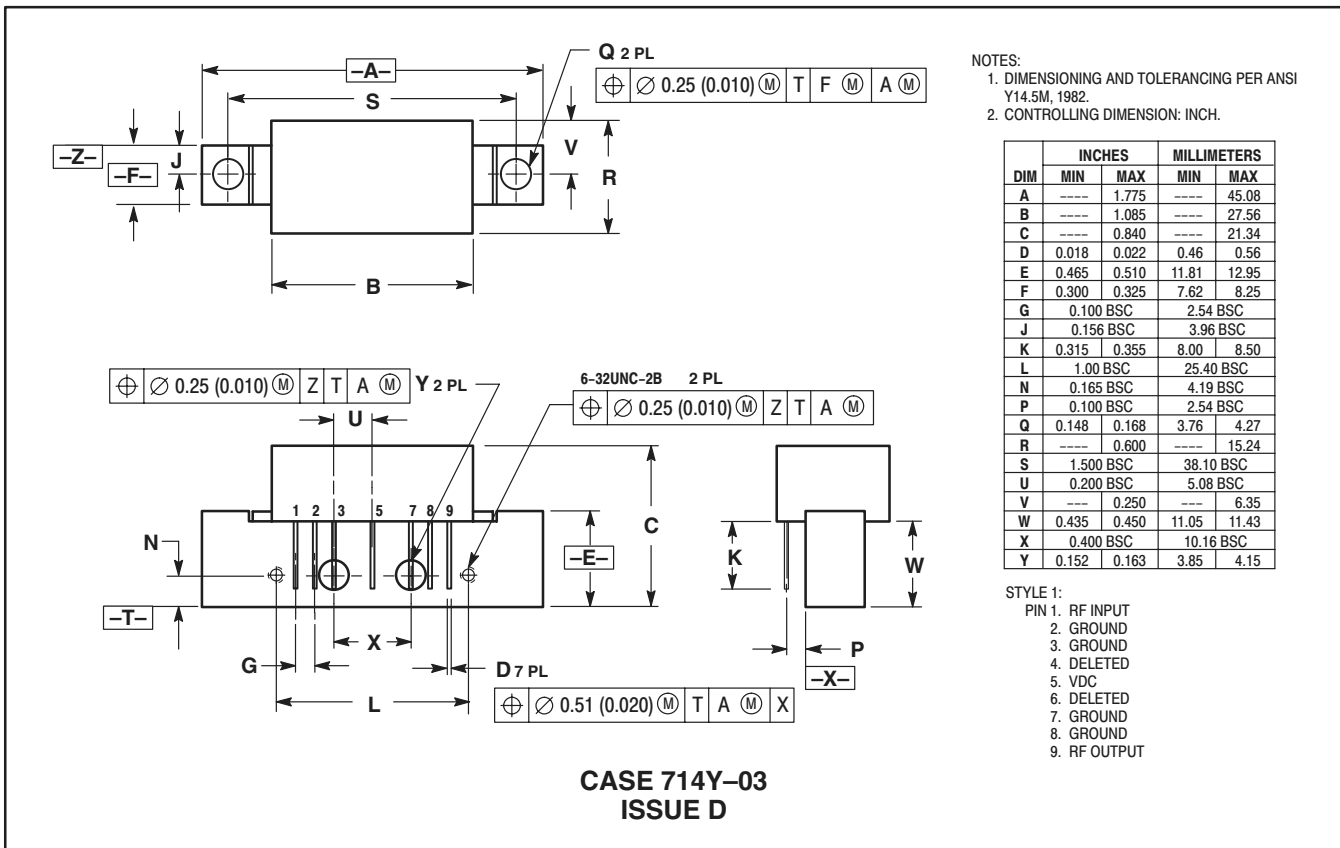

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141, 4-32-1 Nishi-Gotanda, Shagawa-ku, Tokyo, Japan. 03-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
 – http://sps.motorola.com/mfax/

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

HOME PAGE: http://motorola.com/sps/

