

256-BIT


MOS Random Access Memory

MOSTEK

- Low-cost 256x1 RAM in 16-pin package.
- Identical with Mostek's MK 4007 P in all specifications except output current

DESCRIPTION

This economical version of Mostek's 256x1 bit RAM is identical with the MK 4007 P in all electrical characteristics except output current. Performance, operating conditions, timing characteristics, package, and all other specifications are identical with the MK 4007 P. See the MK 4007 P Data Sheet for additional information.

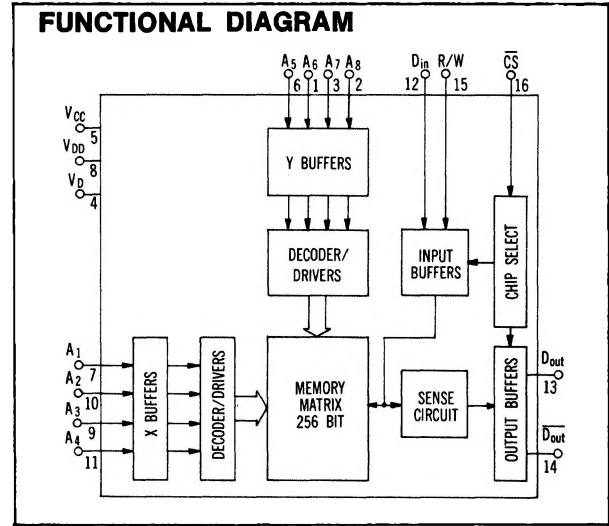

ELECTRICAL CHARACTERISTICS

(Ambient Temperature Range: 0°C to +75°C. $V_{CC} = +5 V \pm 5\%$; $V_D = V_{DD} = -7 V$ to $-13.2 V$, unless otherwise specified.)

	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
POWER	I_D Supply Current, V_D		8.0	16	mA	$V_D = V_{DD} = -9 V \pm 5\%$ Outputs open-circuited.
	I_{DD} Supply Current, V_{DD}		4.0	9	mA	
	P_D Power Dissipation, Total		170	370	mW	
POWER	I_D Supply Current, V_D			19	mA	$V_D = V_{DD} = -13.2 V$ $V_{CC} = +5.25 V$ Outputs open-circuited.
	I_{DD} Supply Current, V_{DD}			10	mA	
	P_D Power Dissipation, Total			535	mW	
	P_{SDBY} Power Dissipation, Standby		30	75	mW	$V_D = V_{CC}$; $V_{DD} = -9V \pm 5\%$
INPUTS	$I_{I(L)}$ Input Leakage Current			1.0	μA	$V_{IN} = 0 V, T_A = 25^\circ C$
	C_{IN} Input Capacitance, Any Logic Input $C_{V(D)}$ Capacitance, V_D Power Supply		7 35	10	pF pF	$T_A = 25^\circ C, F. Meas. = 1 MHz$; Tested input = V_{CC}
OUTPUTS	I_{OL} Output Current, Logic "0": @ $T_A = 25^\circ C$ Output Current, Logic "0": @ $T_A = 70^\circ C$	3.0 2.0	5.6		mA mA	$V_O = +0.40 V$ } $V_{CC} = 5.0 V \pm 5\%$ $V_O = +0.40 V$ } $V_D = V_{DD} = -9.0 V$ $V_O = +2.6 V$ } $\pm 10\%$ $V_O = -1.0 V$ }
	I_{OH} Output Current, Logic "1"	-1.0	-4.2		mA	
	I_{OLC} Output Clamp Current, Logic "0"			8.0	mA	
	$I_{O(L)}$ Output Leakage Current			1.0	μA	
	C_{OUT} Output Capacitance		7	10	pF	$T_A = 25^\circ C$; F meas. = 1 MHz; $V_O = V_{CC}$

NOTES:

- (1) Typical values at $V_{CC} = +5 V, V_D = V_{DD} = -9.0 V^*, T_A = 25^\circ C$.
(*Except Standby Power)

Random Access Memories