

# □ MN102H74D, MN102H74F, MN102H74G

<b>Type</b>	MN102H74D	MN102H74F	MN102H74G
<b>ROM (x8-bit)</b>	64 K	96 K	128 K
<b>RAM (x8-bit)</b>	4 K	4 K	4 K
<b>Package</b>	LQFP100-P-1414 *Lead-free		
<b>Minimum Instruction Execution Time</b>	With main clock operated	83.3 ns (at 3.0 V to 3.6 V, 12 MHz)	
<b>Interrupts</b>	<ul style="list-style-type: none"> <li>• <math>\overline{RST}</math> pin • Watchdog • <math>\overline{NMI}</math> pin • Timer counter 0 to 9 underflow • Timer counter 10 to 13 under/overflow</li> <li>• Timer counter 10 to 13 compare capture A • Timer counter 10 to 13 compare capture B</li> <li>• ATC ch.0 to 3 transfer finish • External 0 to 5 • Serial ch.0 to 3 transmission • Serial ch.0 to 3 reception</li> <li>• A/D conversion finish • USB general-purpose • USBSOFF • USB end points 1 to 8</li> </ul>		
<b>USB Functions</b>	<p>Conforms to USB1.1.          USB transceiver built-in          Full-speed (12 Mbps) supported.          9 end points (FIFO built-in independently)          FIFO size          (EP0, 1, 2, 3, 4, 5, 6, 7, 8): 64, 128, 128, 128, 128, 128, 128, 128, 128 bytes</p> <ul style="list-style-type: none"> <li>• EP0              Control transfer              IN/OUT (two ways)</li> <li>• EP1 to EP8              Interrupt/Bulk/Isochronous transfer supported.              Settable to IN or OUT.              Double Buffering function supported.              When the MAXP size is set to a half or less of the MAXFIFO size for each EP, the Double Buffering function is made valid automatically.</li> </ul>		
<b>Timer Counter</b>	<p>Timer counter 0: 8-bit × 1 (timer output, event count, timer interrupt)          Clock source ..... SYSCLK; XI; prescaler 0; TM0IO pin          Interrupt source ..... Timer counter 0 underflow</p> <p>Timer counter 1: 8-bit × 1 (timer output, event count, timer interrupt)          Clock source ..... SYSCLK; prescaler 0; TM1IO pin          Interrupt source ..... Timer counter 1 underflow</p> <p><span style="border: 1px solid black; border-radius: 10px; padding: 2px;">Connectable</span> Timer counters 0 to 1</p> <p>Timer counter 2: 8-bit × 1 (timer output, event count, timer interrupt, A/D conversion start)          Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 3 underflow;          timer counter 4 underflow; TM2IO pin          Interrupt source ..... Timer counter 2 underflow</p> <p>Timer counter 3: 8-bit × 1 (timer output, event count, timer interrupt)          Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 2 underflow;          timer counter 4 underflow; TM3IO pin          Interrupt source ..... Timer counter 3 underflow</p> <p>Timer counter 4: 8-bit × 1 (timer output, event count, timer interrupt)          Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 2 underflow;          timer counter 3 underflow; TM4IO pin          Interrupt source ..... Timer counter 4 underflow</p>		

■ **Timer Counter (Continue)**

Timer counter 5: 8-bit × 1 (timer output, event count, timer interrupt)

Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 2 underflow;  
timer counter 3 underflow; timer counter 4 underflow; TM5IO pin

Interrupt source ..... Timer counter 5 underflow

**Connectable** Timer counters 2 to 5

Timer counter 6: 8-bit × 1 (timer output, event count, timer interrupt, serial clock generation)

Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 7 underflow;  
timer counter 8 underflow; TM6IO pin

Interrupt source ..... Timer counter 6 underflow

Timer counter 7: 8-bit × 1 (timer output, event count, timer interrupt, serial clock generation)

Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 6 underflow;  
timer counter 8 underflow; TM7IO pin

Interrupt source ..... Timer counter 7 underflow

Timer counter 8: 8-bit × 1 (timer output, event count, timer interrupt, serial clock generation)

Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 6 underflow;  
timer counter 7 underflow; TM8IO pin

Interrupt source ..... Timer counter 8 underflow

Timer counter 9: 8-bit × 1 (timer output, event count, timer interrupt)

Clock source ..... SYSCLK; 1/8 of SYSCLK; 1/32 of SYSCLK; timer counter 6 underflow;  
timer counter 7 underflow; timer counter 8 underflow; TM9IO pin

Interrupt source ..... Timer counter 9 underflow

**Connectable** Timer counters 6 to 9

Timer counter 10: 16-bit × 1 (timer output, event count, input capture, PWM output, 2-phase encoder input)

Clock source ..... SYSCLK; 1/8 of SYSCLK; timer counter 2 or 3 underflow; 2-phase encoding of  
TM10IOA/TM10IOB pin (1×, 4×); TM10IOB pin

Interrupt source ..... Timer counter 10 under/overflow; timer counter 10 compare capture A;  
timer counter 10 compare capture B

Timer counter 11: 16-bit × 1 (timer output, event count, input capture, PWM output, 2-phase encoder input)

Clock source ..... SYSCLK; 1/8 of SYSCLK; timer counter 8 or 9 underflow; 2-phase encoding of  
TM11IOA/TM11IOB pin (1×, 4×); TM11IOB pin

Interrupt source ..... Timer counter 11 under/overflow; timer counter 11 compare capture A;  
timer counter 11 compare capture B

Timer counter 12: 16-bit × 1 (timer output, event count, input capture, PWM output, 2-phase encoder input)

Clock source ..... SYSCLK; 1/8 of SYSCLK; timer counter 4 or 5 underflow; 2-phase encoding of  
TM12IOA/TM12IOB pin (1×, 4×); TM12IOB pin

Interrupt source ..... Timer counter 12 under/overflow; timer counter 12 compare capture A;  
timer counter 12 compare capture B

Timer counter 13: 16-bit × 1 (timer output, event count, input capture, PWM output, 2-phase encoder input)

Clock source ..... SYSCLK; 1/8 of SYSCLK; timer counter 6 or 7 underflow; 2-phase encoding of  
TM13IOA/TM13IOB pin (1×, 4×); TM13IOB pin

Interrupt source ..... Timer counter 13 under/overflow; timer counter 13 compare capture A;  
timer counter 13 compare capture B

See the next page for electric characteristics, pin assignment, and support tool.

<b>Serial Interface</b>	Serial 0: 8-bit × 1 (transfer direction of MSB/LSB selectable; transmission / reception of 7, 8-bit length) Clock source ..... 1/2 or 1/16 of timer counter 6 underflow; external pin
	Serial 1: 8-bit × 1 (transfer direction of MSB/LSB selectable; transmission / reception of 7, 8-bit length) Clock source ..... 1/2 or 1/16 of timer counter 7 underflow; external pin
	Serial 2: 8-bit × 1 (transfer direction of MSB/LSB selectable; transmission / reception of 7, 8-bit length) Clock source ..... 1/2 or 1/16 of timer counter 8 underflow; external pin
	Serial 3: 8-bit × 1 (transfer direction of MSB/LSB selectable; transmission / reception of 7, 8-bit length) Clock source ..... 1/2 or 1/16 of timer counter 9 underflow; external pin
	UART × 2 (common use with serial 0 to 3) I <sup>2</sup> C × 2 (common use with serial 0, 1; single master)

<b>ATC</b>	4-ch DMA transfer enabled between memory and memory or memory and peripheral register by set interrupt factor and software activation setting Transfer unit: bytes/word Transfer mode: 1 word/burst (max. 128 K bytes) Transfer addressing: source/destination pointer fix/increment High-speed transfer enabled between USB-FIFO and internal RAM in single address mode
------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>I/O Pins</b>	<b>I/O</b>	77	• Common use : 77 (pull-up resistance specifiable)
-----------------	------------	----	----------------------------------------------------

<b>A/D Inputs</b>	10-bit × 8-ch. (with S/H)
-------------------	---------------------------

<b>Special Ports</b>	USB ports (D+, D-)
----------------------	--------------------

<b>Notes</b>	4 multiply PLL built-in, generation of internal 48 MHz at external oscillation 12 MHz
--------------	---------------------------------------------------------------------------------------


**Electrical Characteristics**  
**Supply current**

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDDOpr	VI = VDD or VSS, output open f = 12 MHz, VDD = 3.3 V			65+10α*	mA
Supply current at STOP	IDDS	Pin with pull-up resistor is open all other input pins and Hi-Z state input/output			70	μA
Supply current at HALT	IDDH	pins are simultaneously applied VDD or VSS level f = 12 MHz, VDD = 3.3 V, output open			30+10α*	mA

(Ta = -20°C to +70°C, VDD = 3.3 V, VSS = 0 V)

\* "α" depends on products. MN102H74D, MN102H74F, MN102H74G: α = 0  
MN102HF74G: α = 1

Pin Assignment

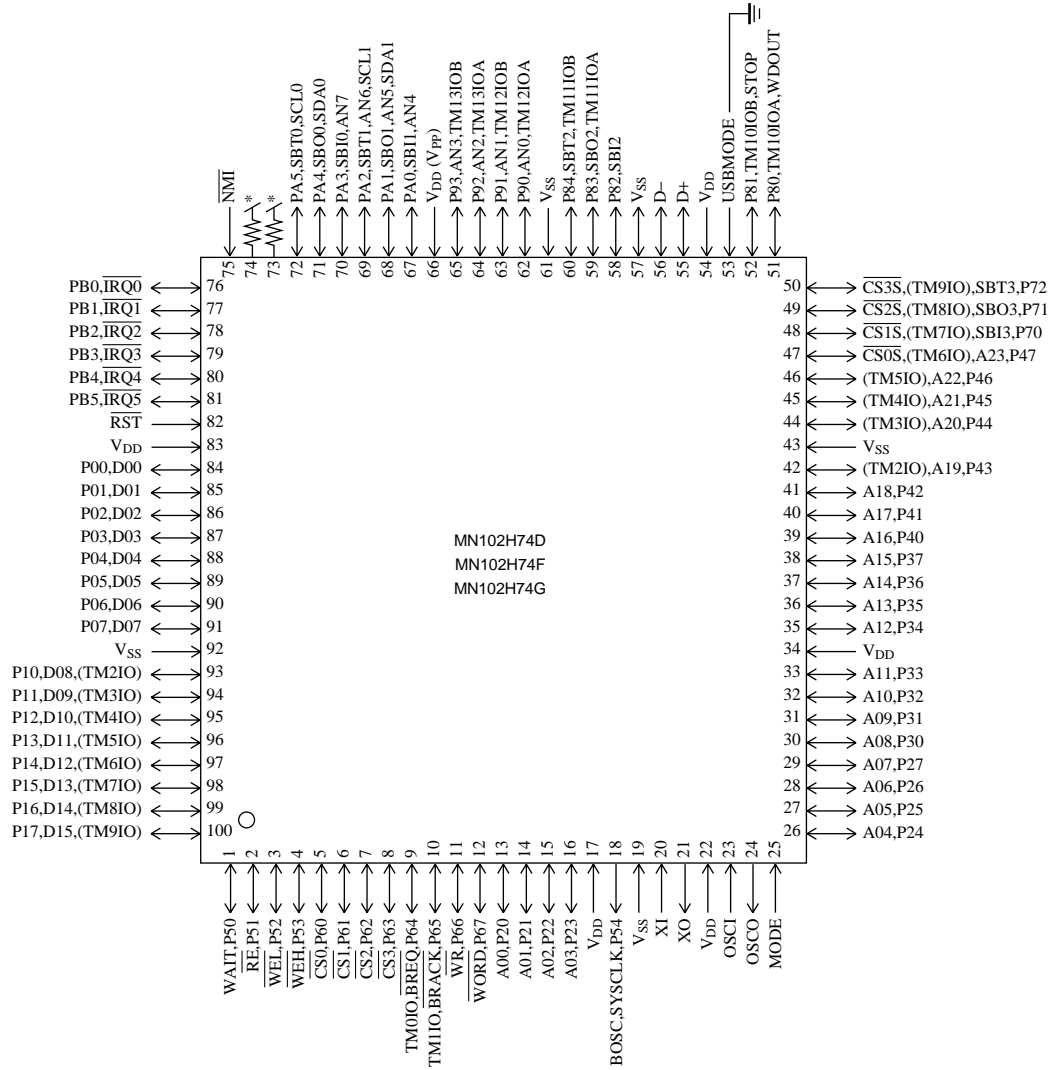

LQFP100-P-1414 \*Lead-free

\* Use 4.7 kΩ to 10 kΩ.

Support Tool

<b>In-circuit Emulator</b>	PX-ICE102H74-LQFP100-P-1414	
<b>Flash Memory Built-in Type</b>	Type	MN102HF74G [ES (Engineering Sample) available]
	ROM (× 8-bit)	128 K
	RAM (× 8-bit)	4 K
	Minimum instruction execution time	83.3 ns (at 3.0 V to 3.6 V, 12 MHz)
	Package	LQFP100-P-1414 *Lead-free

## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.