


DUAL 4-INPUT EXPANDER (FOR USE WITH N74H50, N74H53, N74H55 CIRCUITS)

N74H60


N74H60-A,F

DIGITAL 54/74 TTL SERIES

SCHEMATIC (each expander)

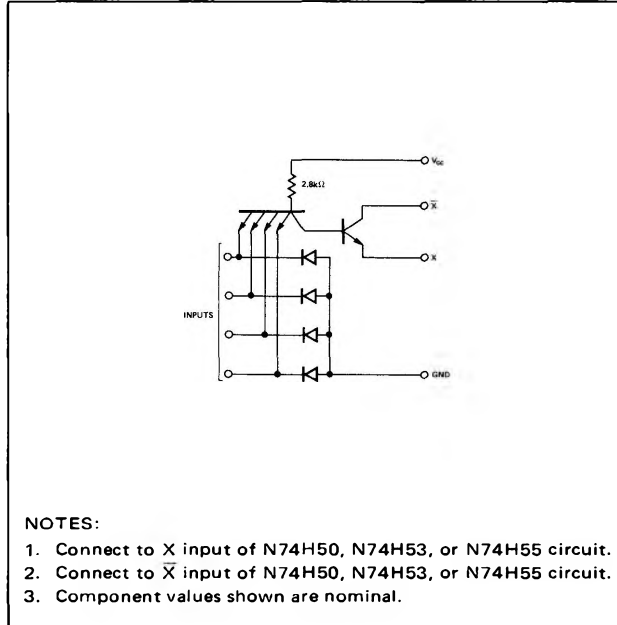

PIN CONFIGURATIONS

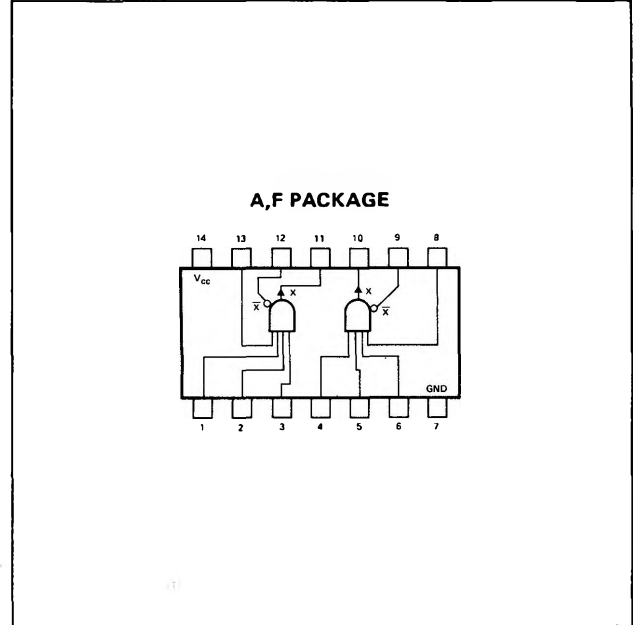

RECOMMENDED OPERATING CONDITIONS

Supply Voltage V_{CC}	4.75V to 5.25V
Maximum number of expanders that may be fanned-in to one N74H50, N74H53, or N74H55 circuit	4

ELECTRICAL CHARACTERISTICS (unless otherwise noted $T_A = 0^\circ\text{C}$ to 70°C)

PARAMETER	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
$V_{in(1)}$	Logical 1 input voltage required at all input terminals to ensure output is in the on state	$V_{CC} = 4.75\text{V}$		2	V
$V_{in(0)}$	Logical 0 input voltage required at any input terminal to ensure output is in the off state	$V_{CC} = 4.75\text{V}$		0.8	V
V_{OS}	On-state output voltage	$V_{CC} = 4.75\text{V}$, $I_{on} = 6.3\text{mA}$, $T_A = 0^\circ\text{C}$	$V_{in} = 2\text{V}$, $V_1 = 1\text{V}$, $T_A = 0^\circ\text{C}$	0.4	V
		$V_{CC} = 5.25\text{V}$, $I_{on} = 7.4\text{mA}$, $T_A = 70^\circ\text{C}$	$V_{in} = 2\text{V}$, $V_1 = 0.6\text{V}$, $T_A = 70^\circ\text{C}$	0.4	V
I_{off}	Off-state output current	$V_{CC} = 4.75\text{V}$, $R = 575\Omega$	$V_{in} = 0.8\text{V}$, $T_A = 0^\circ\text{C}$	$V_1 = 4.5\text{V}$, 570	μA
I_{on}	On-state output current	$V_{CC} = 4.75\text{V}$, $T_A = 0^\circ\text{C}$	$V_{in} = 2\text{V}$, $V_1 = 1\text{V}$,	-600	μA
$I_{in(0)}$	Logical 0 level input current (each input)	$V_{CC} = 5.25\text{V}$,	$V_{in} = 0.4\text{V}$	-2	mA
$I_{in(1)}$	Logical 1 level input current (each input)	$V_{CC} = 5.25\text{V}$, $V_{CC} = 5.25\text{V}$,	$V_{in} = 2.4\text{V}$, $V_{in} = 5.5\text{V}$	50 1	μA mA
$I_{CC(on)}$	On-state supply current	$V_{CC} = 5.25\text{V}$, $V_1 = 0.85\text{V}$	$V_{in} = 4.5\text{V}$,	1.9 3.5	mA
$I_{CC(off)}$	Off-state supply current	$V_{CC} = 5.25\text{V}$, $V_1 = 0.85\text{V}$	$V_{in} = 0$,	3 4.5	mA

SIGNETICS DIGITAL 54/74 TTL SERIES — N74H60

OUTPUT CAPACITANCE V_{CC} and GND terminals open, $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Cx	Effective capacitance of output transistor Q_1	$f = 1\text{ MHz}$		1.3		pF

† All typical values are at $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$