

## Audio ICs

# FM front end BA4402 / BA4404

The BA4402 and BA4404 are front end ICs for FM radio receivers. These devices can be used in a wide range of applications, from 3V portable radios to home stereo tuners.

The BA4402 and BA4404 consist of an RF amplifier, oscillator circuit, mixer circuit, and a variable capacitor-diode for AFC. They are pin compatible, and either can be selected depending on the amount of gain needed and other requirements of the application.


### ● Applications

FM pocket radios  
Radio cassette players  
Home stereos

### ● Features

- 1) Wide operating voltage range : 1.8 to 9V.
- 2) High gain with good stability.
- 3) An appropriate device can be selected depending on the need for AFC and the amount of gain required.

### ● Block diagram

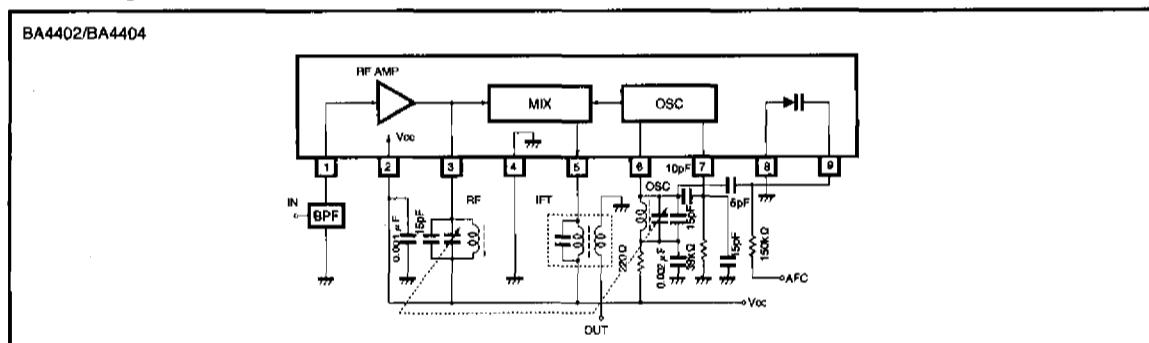

Product name	Variable capacitor	Gain	RF amplifier
BA4402	Yes	32dB	Common base
BA4404	Yes	38dB	Common emitter

## Audio ICs

## BA4402 / BA4404

### ●Absolute maximum ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Limits	Unit
Supply voltage	$V_{cc}$	9	V
Power dissipation	$P_d$	1000*1	mW
Operating temperature	$T_{opr}$	-25~75	°C
Storage temperature	$T_{stg}$	-55~125	°C

\*1 At temperatures above  $T_a = 25^\circ\text{C}$ , decreases 10 mW per degree.

### ●Electrical characteristics (unless otherwise indicated, $T_a = 25^\circ\text{C}$ and $V_{cc} = 3\text{V}$ )

#### BA4402


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Quiescent current	$I_Q$	—	2.5	4.0	mA	—	Fig.1
Output voltage 1	$V_{O1}$	25	40	55	mV	$f_{IN}=100\text{MHz}, 60\text{dB}\mu\text{V}$	Fig.1
Output voltage 2	$V_{O2}$	80	120	160	mV	$f_{IN}=100\text{MHz}, 100\text{dB}\mu\text{V}$	Fig.1
Oscillator voltage	$V_{osc}$	180	250	340	mV	$V_{cc}=2\text{V}$	Fig.1
Oscillation stop voltage	$V_{stop}$	—	1.4	1.6	V	—	Fig.1

#### BA4404


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Quiescent current	$I_Q$	—	3.0	5.0	mA	—	Fig.1
Output voltage 1	$V_{O1}$	55	80	120	mV	$f_{IN}=100\text{MHz}, 60\text{dB}\mu\text{V}$	Fig.1
Output voltage 2	$V_{O2}$	80	120	160	mV	$f_{IN}=100\text{MHz}, 100\text{dB}\mu\text{V}$	Fig.1
Oscillator voltage	$V_{osc}$	180	250	340	mV	$V_{cc}=2\text{V}$	Fig.1
Oscillation stop voltage	$V_{stop}$	—	1.4	1.6	V	—	Fig.1

Front end  
High-frequency signal processors

## ● Measurement circuit

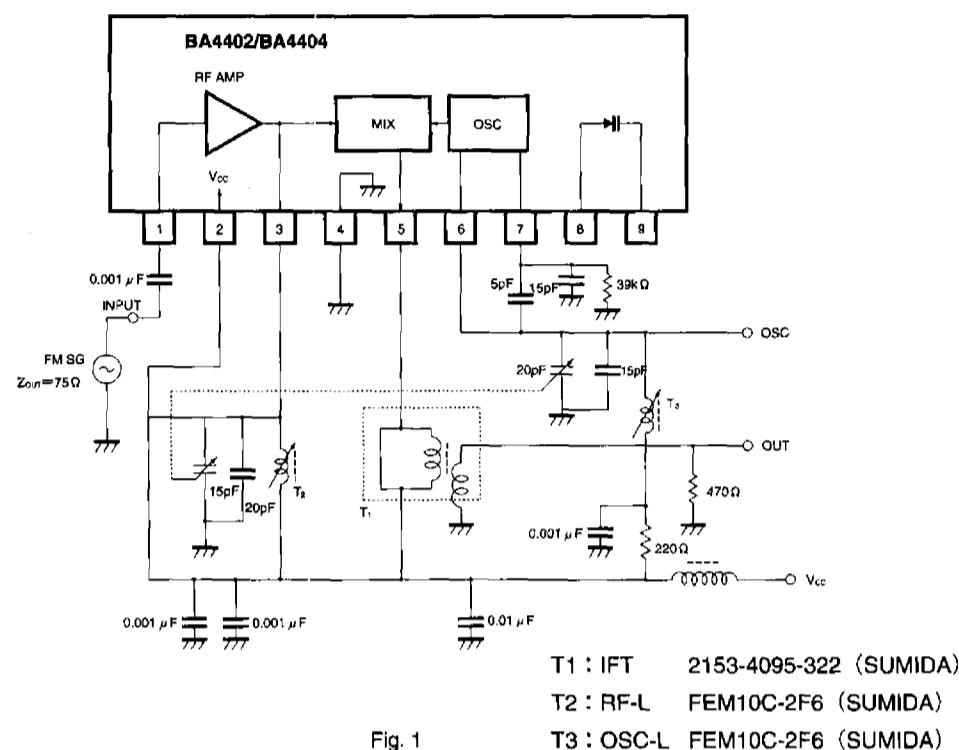

## ● Application example

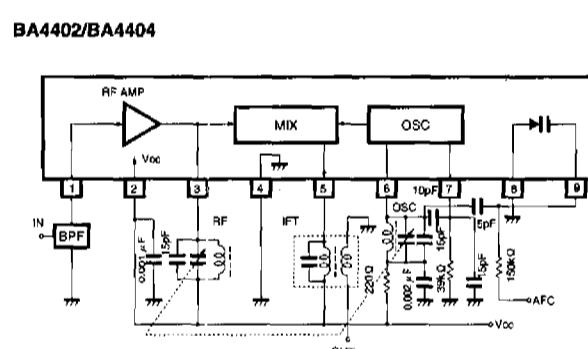

## Audio ICs

## BA4402 / BA4404

### ● Electrical characteristic curves

**BA4402**

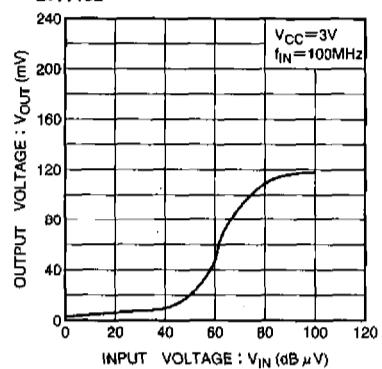


Fig. 3 Output voltage vs.  
input voltage

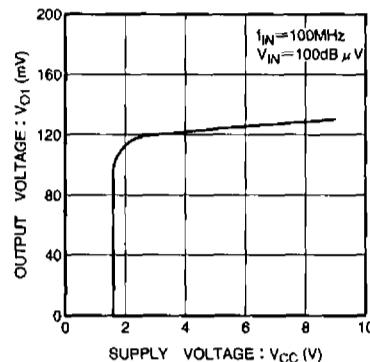


Fig. 4 Output voltage 1 vs.  
supply voltage

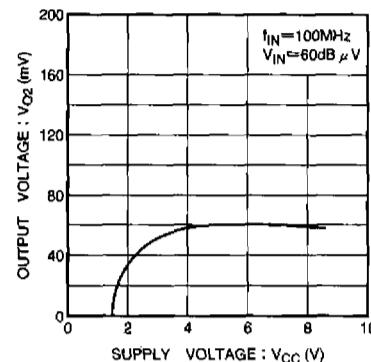


Fig. 5 Output voltage 2 vs.  
supply voltage

Front end

High-frequency signal processors

**BA4404**

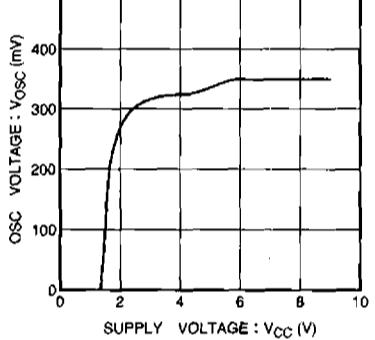


Fig. 6 Oscillator voltage vs.  
supply voltage

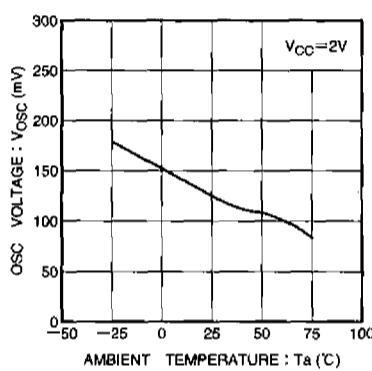


Fig. 7 Oscillator voltage vs.  
ambient temperature

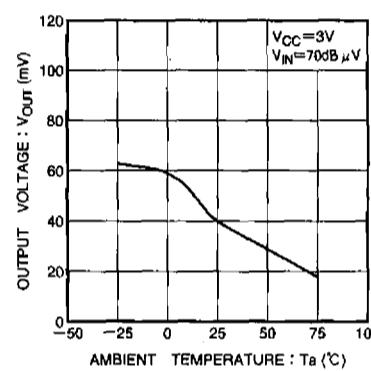


Fig. 8 Output voltage vs.  
ambient temperature

**BA4404**

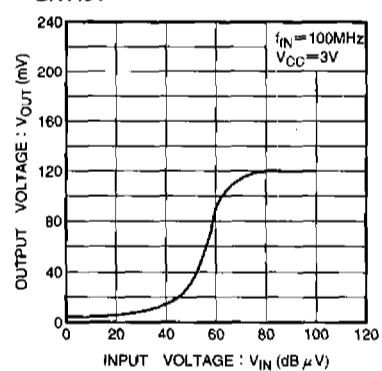


Fig. 9 Output voltage vs.  
input voltage

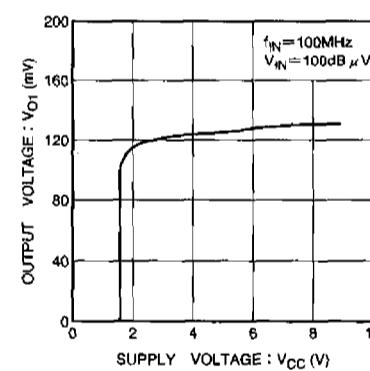


Fig. 10 Output voltage 1 vs.  
supply voltage

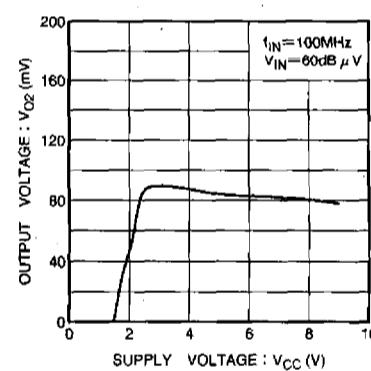


Fig. 11 Output voltage 2 vs.  
supply voltage

## Audio ICs

## BA4402 / BA4404

**BA4404**

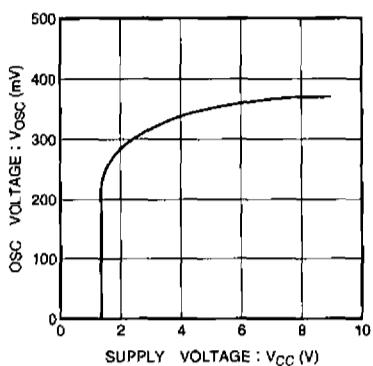


Fig. 12 Oscillator voltage vs.  
supply voltage

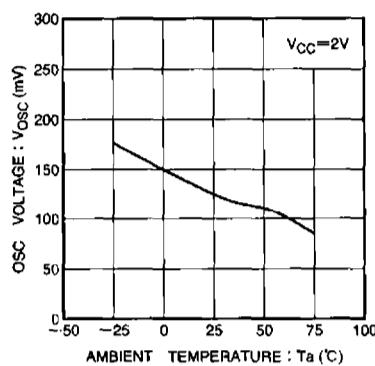


Fig. 13 Oscillator voltage vs.  
ambient temperature

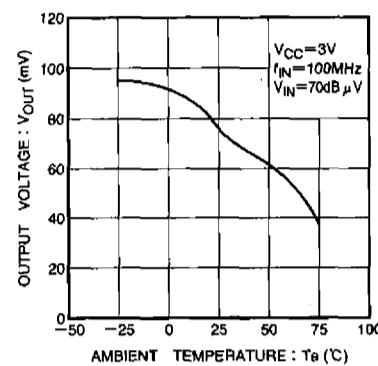


Fig. 14 Output voltage vs.  
ambient temperature

**BA4402/BA4404**

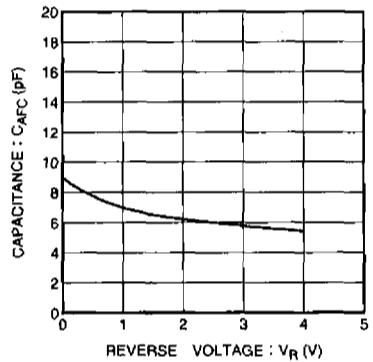


Fig. 15 AFC capacitor capacitance vs.  
applied voltage

●External dimensions (Unit: mm)

