
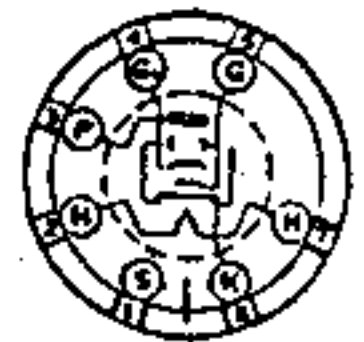


25 L 6
25 L 6-G

25 L 6
25 L 6-G

BEAM POWER TETRODE
(E)

| | | | | |
|-------------------|---|--------|--------|----------|
| V_f | = | | 25 | V. |
| I_f | = | | 0,3 | A. |
| $V_a(\text{max})$ | = | 110 | 110 | V. |
| V_{g2} | = | 110 | 110 | V. |
| V_g | = | -7,5 | -7,5 | V. |
| I_a | = | 49-54 | 50 | mA. |
| I_{g2} | = | 4-9 | 4-11 | mA. |
| R_i | = | 10.000 | 10.000 | Ω |
| S | = | 8,2 | 8,2 | mA/V. |
| $W_o(10\%)$ | = | 2,1 | 2,2 | Wtt. |
| R_a | = | 1.500 | 2.000 | Ω |
| R_k | = | 1.360 | 1.340 | Ω |

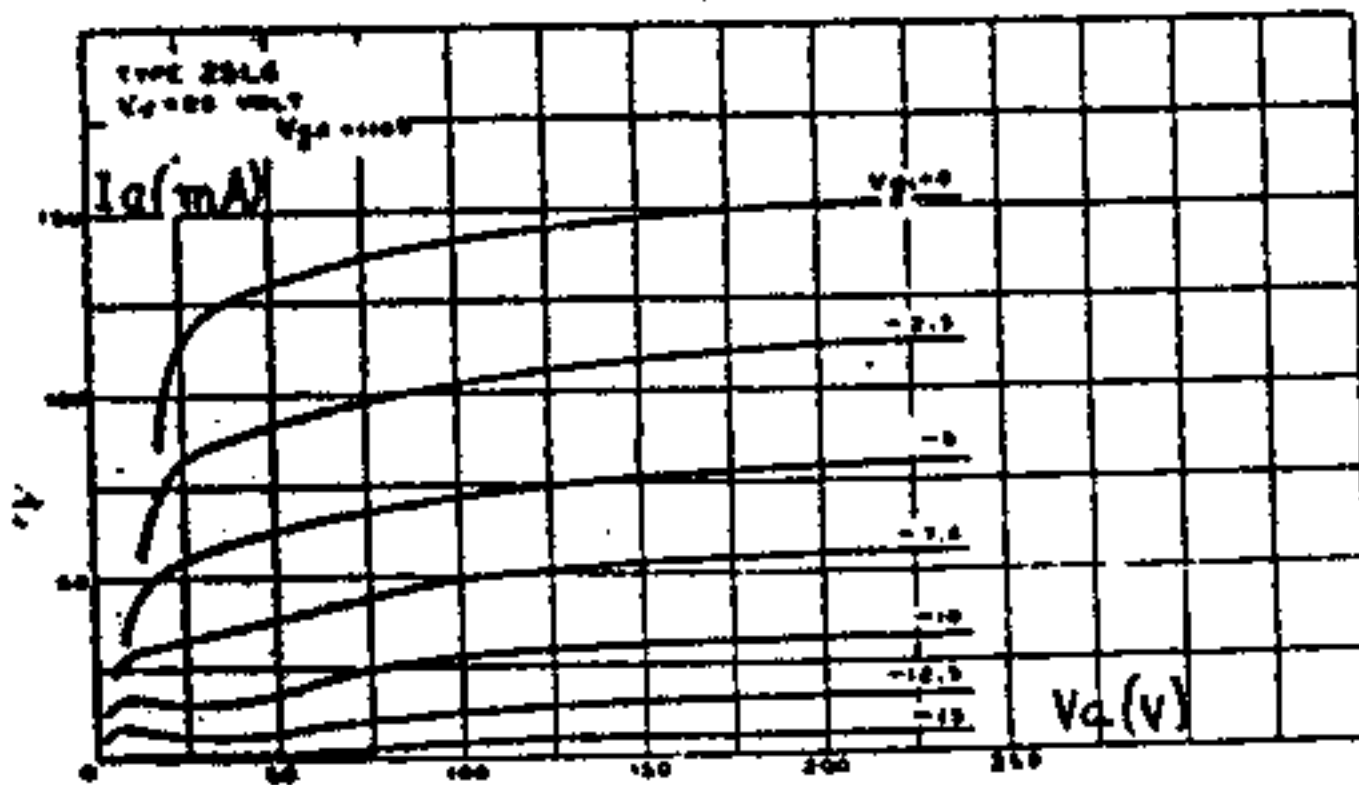

25L6 (G)