


**ISOLATED PLASTIC**

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	15.10	15.50	0.594	0.611
B	20.70	21.10	0.814	0.831
C	14.30	15.60	0.561	0.615
D	16.10	16.50	0.632	0.650
G	3.40	-	0.133	-
H	4.40	4.60	0.173	0.182
I	4.08	4.17	0.161	0.164
J	1.45	1.55	0.057	0.062
L	0.50	0.70	0.019	0.028
M	2.70	2.90	0.106	0.115
N	5.40	5.65	0.212	0.223
P	1.20	1.40	0.047	0.056



Weight = 4.7 g  
 Marking : Type number  
 Cooling method : C  
 Recommended torque value : 0.8 m.N.  
 Maximum torque value : 1.0 m.N.  
 Electrical isolation : 2500V DC  
 Capacitance : 12 pF

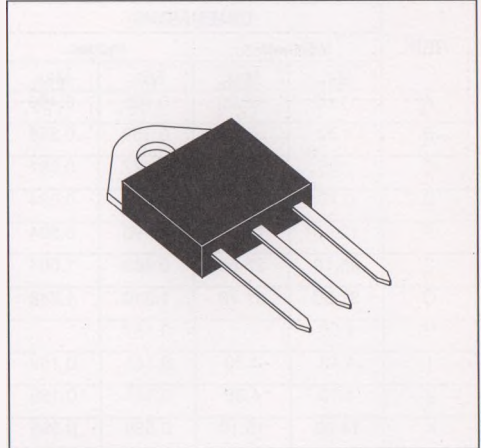