

# *—Standard Valves—*

## 4013-D VALVE

SINGLE ENDED WATER COOLED TRIODE.

### SPECIFICATION.

#### Cathode.

Pure Tungsten filament.  
Constant voltage type.

#### Water Jacket.

Type MS.1362 Grp. I.

Type MS.1362 Grp. 20. For below panel  
connection.

#### Water Flow.

3 gallons per minute.


#### Dimensions.

Overall length	18 $\frac{3}{4}$ " (47.7 cms.)
Bulb diameter	3 $\frac{1}{2}$ " (8.9 cms.)
Net weight	2 $\frac{1}{2}$ lbs. (1,150 gms.)

#### Constants.

Filament voltage	19-21 volts.
(exact filament voltage marked on bulb)	
Nominal filament current	41 amps.
Total emission	6 amps.
*Impedance	4,200 ohms
*Amplification factor	21
Grid-anode capacity	21 $\mu\mu$ F.
Anode-filament capacity	2.5 $\mu\mu$ F.
Grid-filament capacity	16 $\mu\mu$ F.

\* at anode current of 0.75 amp.

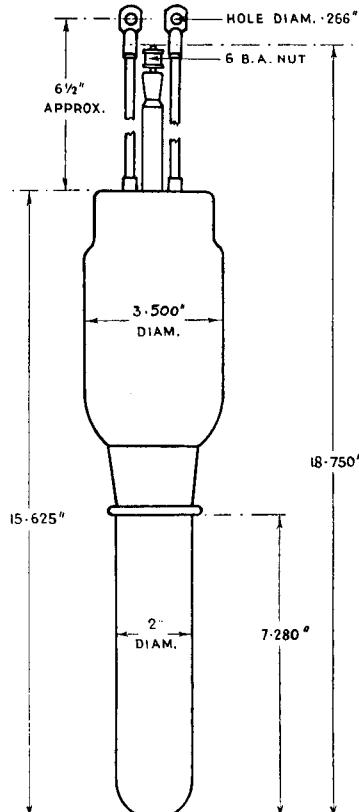

#### LIMITING CONDITIONS FOR SAFE OPERATION.

Maximum direct anode voltage	6,000 volts
Maximum direct anode voltage for anode modulation	4,000 volts
Maximum direct anode current	1.5 amps.
Maximum anode dissipation	5 Kw.
Maximum grid dissipation	100 watts
Maximum frequency for above ratings	15 Mc.
Maximum anode voltage for frequency of 22 Mc.	5,000 volts

# *—Standard Valves—*

## TYPICAL OPERATING CONDITIONS.



		Class B A.F. Amp. For balanced 2 valve circuit
Direct anode voltage	5,000 volts	
Grid bias	—100 to —150 volts	
Direct anode current per valve—zero signal	0·25 amps.	
Direct anode current per valve—maximum signal	1·2 amps.	
Load resistance—anode to anode	3,700 ohms	
Maximum signal output—2 valves	6·6 Kw.	
Anode dissipation	2·7 Kw.	

## RADIO FREQUENCY OPERATION.

	Class B Telephony	Class C Telephony	Class C Telegraphy
	Modulated Carrier applied to grid	Subject to anode modulation	Unmodulated
Direct anode voltage	5,000	3,500	5,000 volts
Direct anode current	0·75	0·75	1·5 amps.
Grid bias	—190	—300	—500 to —750 volts
Anode dissipation	2·5	0·9	2·5 Kw. 5 Kw.
Carrier output	1·25	1·8	

# —Standard Valves—

These curves are taken with A.C. filament heating, grid and anode voltages being referred to the centre point of the filament.

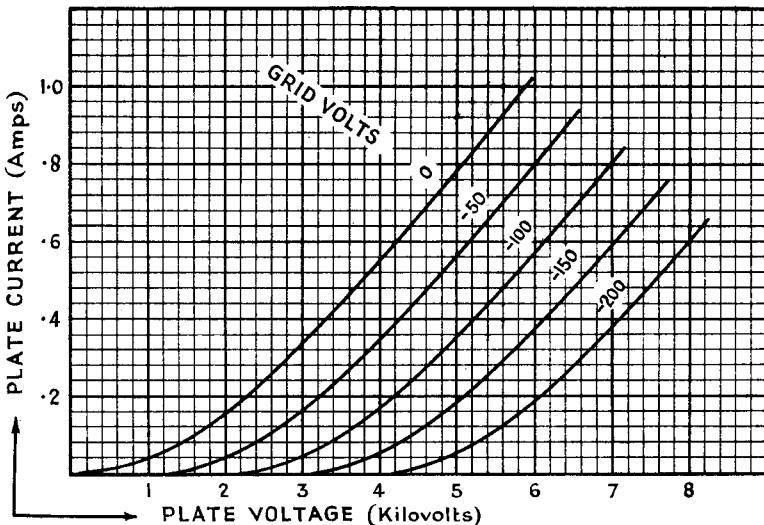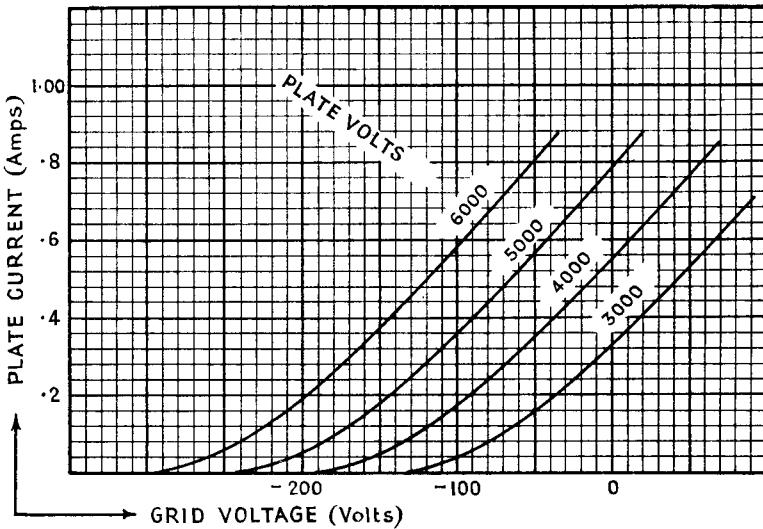

PRINTED IN  
ENGLAND