



**DAMPED  
DIAPHRAGM  
DRIVE**

# N314T-8

- SCREW-ON  
 BOLT-ON


## SPECIFICATION

Throat Size	1.4", 35.6 mm
Nominal Impedance*	8 Ω
Minimum Impedance	6.7 ohm @ 3.7 kHz
Power Rating*	100 W (AES)
Resonance	550 Hz
DC Resistance (Re)	4.80 Ω
Usable Frequency Range	800 Hz - 20 kHz
Recommended Crossover	800 Hz / 12 dB
Sensitivity*	110.9 dB
Magnet Material	Neodymium
Magnet Weight	11 oz, 0.31 kg
Voice Coil Diameter	3.0", 76 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium

## MOUNTING INFORMATION

Overall Diameter	5.72", 145.3 mm
Driver Volume Displaced	0.023 cu.ft., 0.66 liters
Depth	2.53", 64.3 mm
Net Weight	5.1 lb, 2.3 kg
Shipping Weight	5.4 lb, 2.4 kg
Mounting Thread	N/A
Mounting Holes Diameter	4X 1/4-20
Mounting Holes B.C.D.	4.00", 101.6 mm

## FREQUENCY RESPONSE & IMPEDANCE CURVE\*

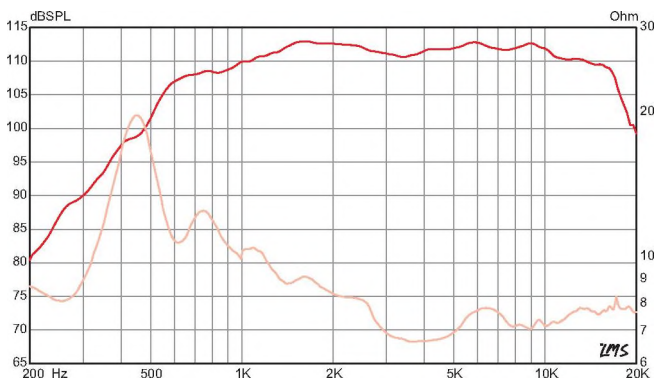

\* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.